

MEDICAL EQUIPMENT

SHANGHAI ZIMAI SAFETY TECHNOLOGY CO., LTD.

Add: No.29, Lane 1500 Xinfei Road, Songjiang 201611, Shanghai, China

Tel No.: +86 21 6776 6378

Fax No.: +86 21 6776 6379

E-mail: Sales@zmsafety.cn

www.xiebay.cn

SHANGHAI ZIMAI SAFETY TECHNOLOGY CO., LTD.

上海孜迈防护科技有限公司



ABOUT US

ZIMAI Safety, founded in 2018. As leading supplier of PPE in all over the world, we innovatively R&D new line of medical devices from year 2021. We are focusing on cooperation with new distributors of medical devices with focus on continuous improvement of customer experience.

Being qualified and authorized on the import and export activity for medical devices in category I / II / III , ZIMAI has been dedicated to provide brand quality medical devices with CE or FDA approval to customers in world the world.

ZIMAI values customers the most, and takes quality as the priority. A Quality Management System has already been established to provide a framework for measuring and improving the company's performance. The company has been certified to ISO 9001:2015, ISO 14001:2015 and ISO13485:2016.

With focus on establishing a technology motivated digital platform for global products, dedicating to the project of improving individual heath of mankind, ZIMAI is on the way.


MEDICAL EQUIPMENT

CONTENTS

Hospital Bed	01-24
Shadowless Lamp & Hanging Tower	25-36
Emergency Cart	37-42
Hospital Furniture	43-56
ECG Monitoring	57-59
Disinfection Cabinet	60-68
Disinfection Machine	69-82
Home First Aid	83-96
Medical Dressing	97-100
Other Accessories	101-104


Manual Bed

V4W

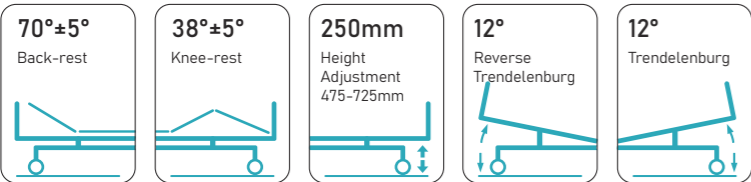

Manual Bed

V2K



Technical Parameters Technical Configuration


External Length	2130mm	Manual Cranks	4pcs
External Width	1020mm	5" Hardshell Castors	4pcs
Bed Height Min.	475mm	L-shaped foldable side rail	1 set
Bed Height Max.	725mm	PP Bed Ends with Safe Lock and dia. 65mm Bumper Wheels	1 set
Mattress Platform	1925x900mm	PP Bed Platform with Integrated Mattress Retainer	1 set
Safe Working Load	200kg	IV Pole 4 Hooks	1 set
		IV Pole Prevision	4pcs
		Drainage Hook	2pcs

Technical Parameters Technical Configuration

External Length	2130mm	Manual Cranks	2pcs
External Width	995mm	5" Hardshell Castors	4pcs
Bed Height	500mm	Foldable side rail	1 set
Mattress Platform	1925x900mm	PP Bed Ends with Safe Lock and dia. 65mm Bumper Wheels	1 set
Safe Working Load	200kg	PP Bed Platform with Integrated Mattress Retainer	1 set
		IV Pole 4 Hooks	1 set
		IV Pole Prevision	4pcs
		Drainage Hook	2pcs

Manual Bed

V3V

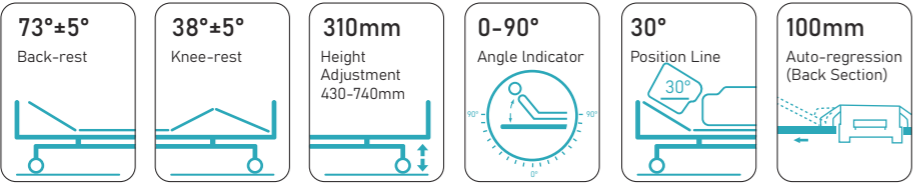


Technical Parameters Technical Configuration

External Length	2130mm	Manual Cranks	3pcs
External Width	1025mm	5" Hardshell Castors	4pcs
Bed Height Min.	430mm	Foldable side rail	1 set
Bed Height Max.	740mm	PP Bed Ends with Safe Lock and dia. 65mm Bumper Wheels	1 set
Mattress Platform	1925x900mm	PP Bed Platform with Integrated Mattress Retainer	2 set
Safe Working Load	200kg	IV Pole 4 Hooks	1 set
		IV Pole Prevision	4pcs
		Drainage Hook	2pcs

Electric ICU Bed

Y8Y

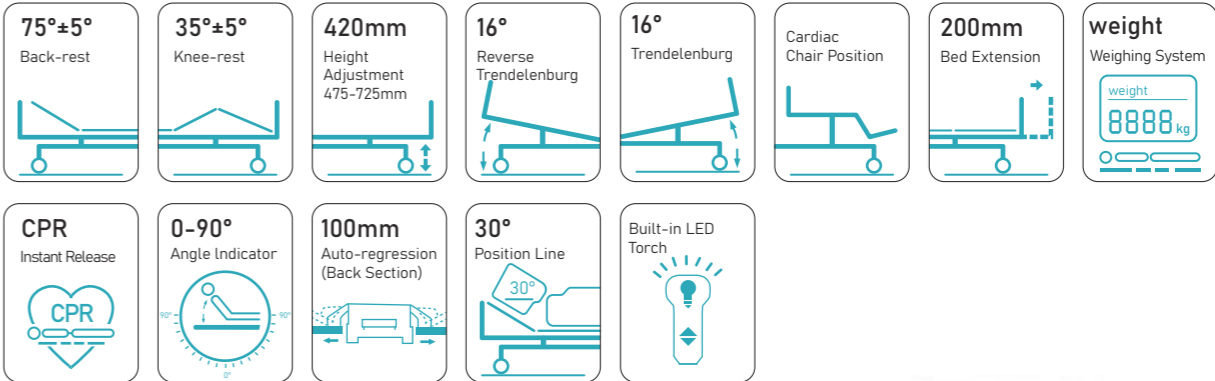


Technical Parameters Technical Configuration

External Length	2130mm	Linear Motor	4pcs
External Width	1050mm	5" Double Side Castors, Central Locking System	4pcs
Bed Height Min.	360mm	ABS Oasis Side Rail Extra Height	1 set
Bed Height Max.	780mm	ABS Oasis Bed Ends with Safe Lock	1 set
Mattress Platform	1925x880mm	PP Bed Platform, Removable & Washable	9pcs
Safe Working Load	250kg	Plastic Socket Inside PP Guardrail for Phone or Glasses	2pcs
		Angle Indicator for Back-rest and Trendelenburg Position	4pcs
		Dia. 70mm Wall Bumper Wheel	4pcs
		IV Pole 4 Hooks	1 set
		IV Pole Prevision	4pcs
		Drainage Hook	2pcs
		Central Locking Pedal	2pcs
		ABS Mattress Stopper	2pcs
		Hand Controller	1pc
		Hand Controller	
		Electric CPR	

Electric ICU Bed

X9X

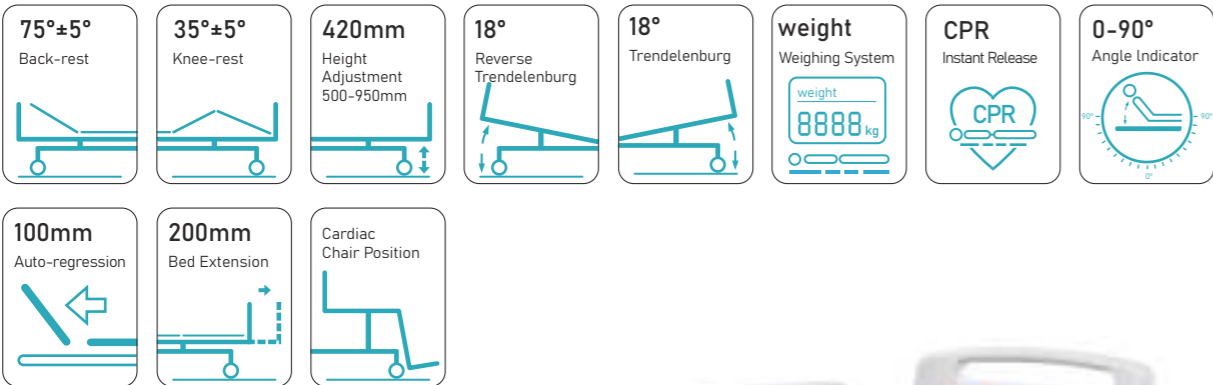

Technical Parameters


External Length	2040-2240mm
External Width	1020mm
Bed Height Min.	500mm
Bed Height Max.	950mm
Mattress Platform	1820-2020x820mm
Safe Working Load	250kg

Technical Configuration

Linear Motor	6pcs
6" Double Side Castors, Central Locking System	4pcs
ABS Side Rail with Integrated Control Panel	1 set
ABS Bed Ends One Stop Removable	1 set
Dia. 70mm Wall Bumper Wheel	4pcs
IV Pole 4 Hooks	1pcs
IV Pole Prevision	4pcs
Drainage Hook	4pcs
5th Directional Wheel Pedal	2 set
X-ray translucent Mattress Platform	2pcs
Back-up Battery	1 set
Night Light	1 set
Bed Push Handle for Emergency Transfer	1 set
Manual CPR	1 set
Electric CPR	

Electric Bed

Y6Y

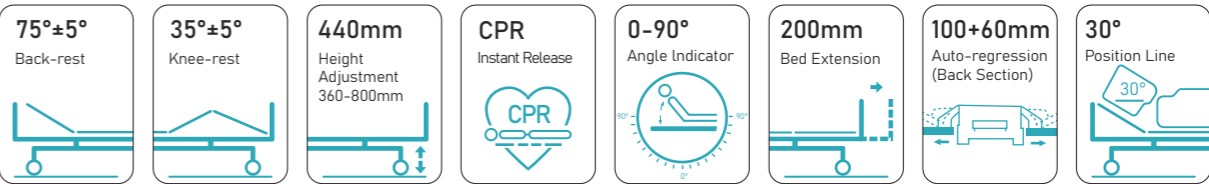

Technical Parameters


External Length	2130mm
External Width	1050mm
Bed Height Min.	360mm
Bed Height Max.	800mm
Mattress Platform	1925x880mm
Safe Working Load	250kg

Technical Configuration

Linear Motor	3pcs
5" Double Side Castors, Central Locking System	4pcs
ABS Oasis Side Rail Extra Height	1 set
ABS Oasis Bed Ends with Safe Lock	1 set
PP Bed Platform, Removable & Washable	9pcs
Plastic Socket Inside PP Guardrail for Phone or Glasses	2pcs
Angle Indicator for Back-rest and Trendelenburg Position	4pcs
Dia. 70mm Wall Bumper Wheel	4pcs
IV Pole 4 Hooks	1 set
IV Pole Prevision	4pcs
Drainage Hook	2 set
Central Locking Pedal	2 set
ABS Mattress Stopper	2 set
Hand Controller	1 set

Electric Bed

V8W

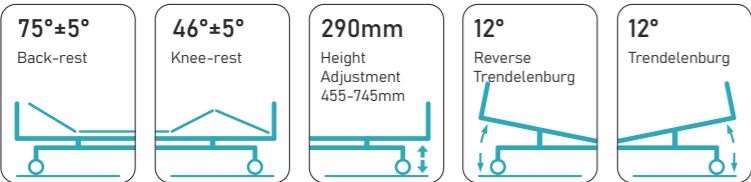


Technical Parameters Technical Configuration

External Length	2085mm	Linear Motor	3pcs
External Width	1020mm	5" Hardshell Castors	4pcs
Bed Height Min.	455mm	Foldable side rail	1 set
Bed Height Max.	745mm	PP Bed Ends with Safe Lock and dia. 65mm Bumper Wheels	1 set
Mattress Platform	1925x900mm	PP Bed Platform with Integrated Mattress Retainer	9pcs
Safe Working Load	250kg	IV Pole 4 Hooks	1 set
		IV Pole Prevision	4pcs
		Drainage Hook	1 set
		Hand Controller	1pc

Electric Bed

V6V

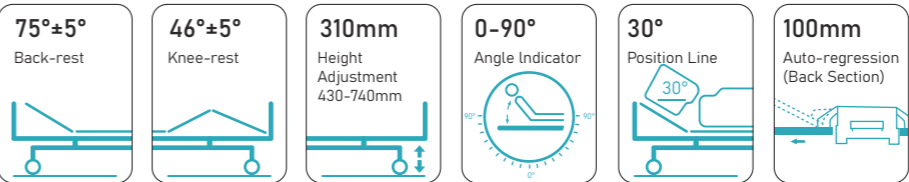


Technical Parameters Technical Configuration

External Length	2085mm	Linear Motor	3pcs
External Width	1025mm	5" Hardshell Castors	4pcs
Bed Height Min.	430mm	PP Side Rail Extra Height	1 set
Bed Height Max.	740mm	PP Bed Ends with Safe Lock and dia. 65mm Bumper Wheels	1 set
Mattress Platform	1925x900mm	PP Bed Platform with Integrated Mattress Retainer	1 set
Safe Working Load	250kg	Angle Indicator for Back-rest Position	2pcs
		IV Pole 4 Hooks	1 set
		IV Pole Prevision	4pc
		Drainage Hook	1 set
		Hand Controller	1pc

Electric Bed

V8V

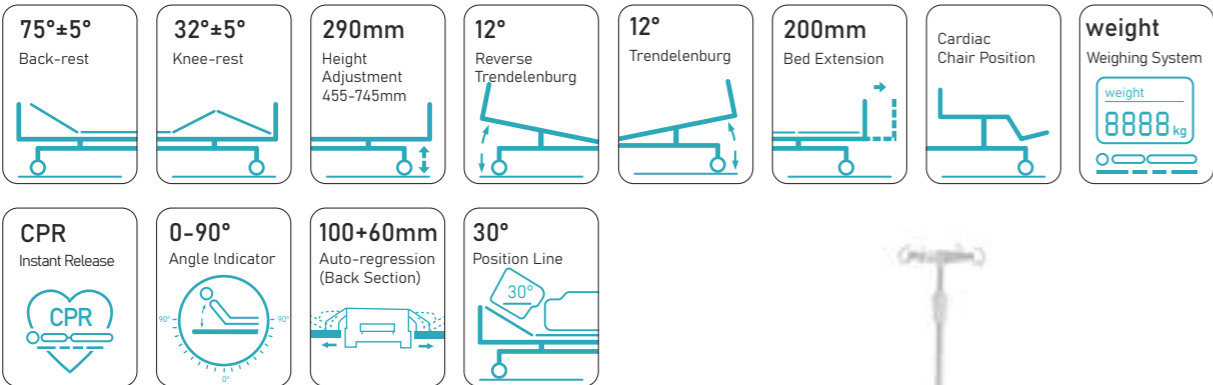

Technical Parameters


External Length	2085mm
External Width	1025mm
Bed Height Min.	455mm
Bed Height Max.	745mm
Mattress Platform	1925x900mm
Safe Working Load	250kg

Technical Configuration

Linear Motor	4pcs
5" Double Side Castors, Central Locking System	4pcs
PP Side Rail Extra Height	1 set
PP Bed Ends with Safe Lock and dia. 65mm Bumper Wheels	1 set
PP Bed Platform with Integrated Mattress Retainer	1 set
Angle Indicator for Back-rest and Trendelenburg Position	4pcs
IV Pole 4 Hooks	1 set
IV Pole Prevision	4pcs
Drainage Hook	2pcs
Central Locking Pedal	2pcs
Cardiac Chair Position	1pc
Cardiac Chair Position	1pc
Integrated Control Panel	2 sets
Manual CPR	
Auto Break at 30°	
Emergency Stop Button	

Electric Bed

V6K

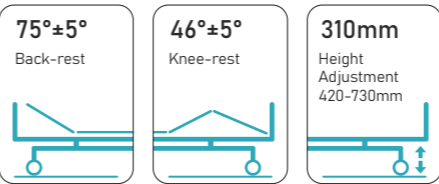

Technical Parameters


External Length	2085mm
External Width	995mm
Bed Height Min.	420mm
Bed Height Max.	730mm
Mattress Platform	1925x900mm
Safe Working Load	200kg

Technical Configuration

Linear Motor	3pcs
Hand Controller	1pc
5" Covered Castors	4pcs
Foldable Side Rail	1 set
PP Bed Ends with Safe Lock and dia. 65mm Bumper Wheels	1 set
PP Bed Platform with Integrated Mattress Retainer	1 set
IV Pole 4 Hooks	1 set
IV Pole Prevision	4pcs
Drainage Hook	2pcs

Electric Bed

D8D

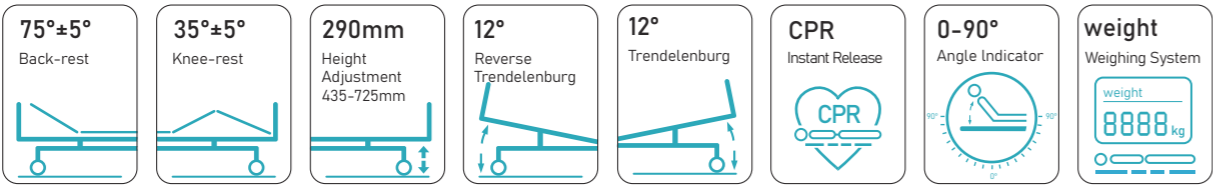


Technical Parameters Technical Configuration

External Length	2280mm	Linear Motor	4pcs
External Width	1090mm	5" Double Side Castors, Central Locking System	4pcs
Bed Height Min.	435mm	ABS Grace Side Rail with Integrated Control Panel	1 set
Bed Height Max.	725mm	ABS Grace Bed Ends with Integrated LCD Control Panel	1 set
Mattress Platform	1925x900mm	Dia.85mm Wall Bumper Wheel	4pcs
Safe Working Load	250kg	Trapeze Socket	2pcs
		IV Pole 4 Hooks	1 set
		IV Pole Prevision	4pcs
		Drainage Hook	2pcs
		Central Locking Pedal	2pcs
		Manual CPR	

Electric Bed

Y6W

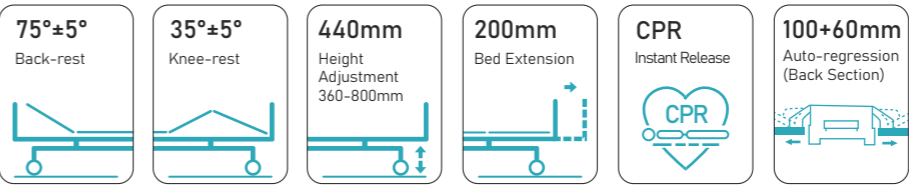


Technical Parameters Technical Configuration

External Length	2130mm	Linear Motor	3pcs
External Width	1015mm	5" Covered Castors with Brake	4pcs
Bed Height Min.	365mm	Foldable Side Rail	1 set
Bed Height Max.	805mm	ABS Oasis Bed Ends with Safe Lock	1 set
Mattress Platform	1925x880mm	PP Bed Platform, Removable & Washable	9pcs
Safe Working Load	250kg	Dia.70mm Wall Bumper Wheel	4pcs
		IV Pole 4 Hooks	1 set
		IV Pole Prevision	4pcs
		Drainage Hook	2pcs
		ABS Mattress Stopper	2pcs
		Hand Controller	1pc

Electric ICU Bed

Y8T

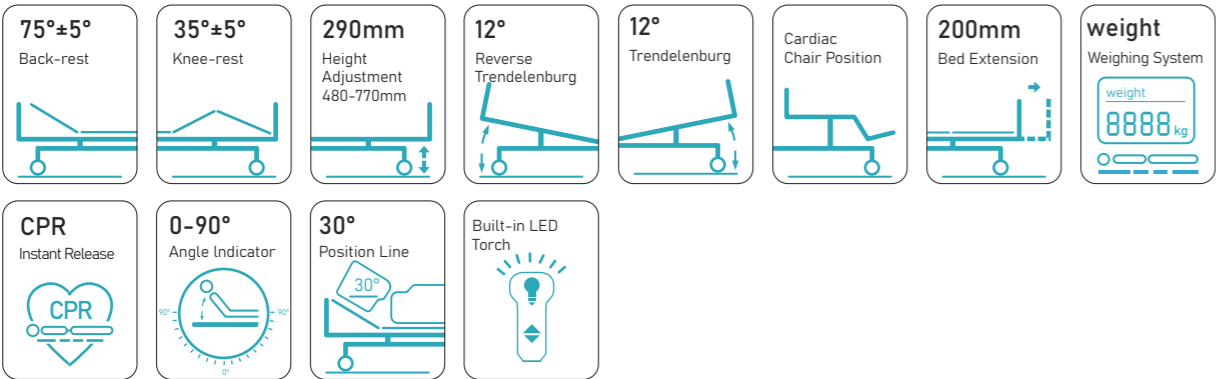

Technical Parameters

External Length	2140mm
External Width	1060mm
Bed Height Min.	480mm
Bed Height Max.	770mm
Mattress Platform	1925x900mm
Safe Working Load	250kg

Technical Configuration

Linear Motor	4pcs
5" Double Side Castors, Central Locking System	4pcs
ABS Oasis Side Rail Extra Height	1 set
ABS Oasis Bed Ends with Safe Lock	1 set
Stamp Formed Bed Platform	1pc
Plastic Socket Inside PP Guardrail for Phone or Glasses	2pcs
Angle Indicator for Back-rest and Trendelenburg Position	4pcs
Dia.70mm Wall Bumper Wheel	4pcs
IV Pole 4 Hooks	1 set
IV Pole Prevision	4pcs
Drainage Hook	2pcs
Central Locking Pedal	2pcs
Emergency Stop Button	1pc
Manual CPR	
Electric CPR	

Children Bed

CR2Q



Technical Parameters


External Length	1820mm
External Width	860mm
Bed Height	600mm
External Height	1100mm
Mattress Platform	1600x680mm

Technical Configuration

Manual Cranks	2pcs
Full Length Side Rail	1 set
Intergrated Bed Ends	1 set
Anti-slip Bed Feet Cover	4pcs
IV Pole	1pc
IV Pole Prevision	4pcs
Drainage Hook	2pcs
Shoes Holder	1pc

Electric Children Bed

CT8K

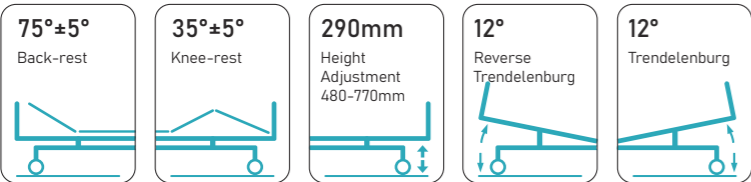


Technical Parameters Technical Configuration

External Length	1835mm	Linear Motor	4pcs
External Width	780mm	5" Double Side Castors, Central Locking System	4pcs
Bed Height Min.	480mm	Aluminium Alloy Side Rail with Extra Protecion	1 set
Bed Height Max.	770mm	Aluminium Alloy Bed Ends	1 set
Mattress Platform	1625x650mm	IV Pole	1pc
		IV Pole Prevision	4pcs
		Drainage Hook	2pcs

Baby Crib

X01-1

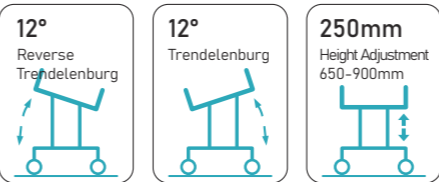


Technical Parameters Technical Configuration

External Length	875mm	Hydraulic Pump	1pc
External Width	825mm	Bassinet	1pc
Bed Height Min.	650mm	3" Double Side Castors	4pcs
Bed Height Max.	900mm		

Electric Examination Table

X26




Technical Parameters Technical Configuration

External Length	1810mm	Pillow	1pc
External Width	680mm	Motor	1pc
Bed Height Min.	480mm	Mechanical Lever to Adjust Back Rest	1pc
Bed Height Max.	850mm	2" Casters	2pcs
		Hand Controller	1pc
		Paper Roll Holder	1pc

Gynecological Examination Table

A048




Technical Parameters Technical Configuration

External Length	1810mm	Drawer	4pcs
External Width	690mm	Step Stool	1pc
Table Height	880mm	Retractable Foot Board	1pc
		Lithotomy Rod	1 set
		Stainless Steel Basin	1pc
		Paper Roll Holder	1pc


Gynecological Table

A045-1



Electric Gynecological Examination Couch

A99-8

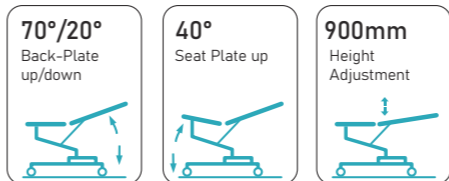

Technical Parameters Technical Configuration

External Length	1820mm	Hand Bar	1 Set
External Width	590mm	Mechanical Lever	2 Sets
Table Height	800mm	Lithotomy Rod	1 Set
		Stainless Steel Basin	1pc
		Anti-slip Bed Feet Cover	4pcs

Technical Parameters Technical Configuration

External Length	1400mm	Hand Bar	2pcs
External Width	740mm	Leg Support with Cushion	2pcs
Table Height Min.	610mm	Foot Pedal	1pc
Table Height Max.	1100mm	Stainless Steel Basin	1pc


Electric Examination Table

X12



Hydraulic Examination Table

X14



Technical Parameters Technical Configuration


External Length	1900mm	Linear Motor	1pc
External Width	600mm	Anti-slip Bed Feet Cover	4pcs
Table Height Min.	500mm	Removable Pillow	1pc
Table Height Max.	730mm		

Technical Parameters Technical Configuration

External Length	1940mm	Hydraulic Pump	1pc
External Width	700mm	Adjustable Air Spring	2pcs
Table Height Min.	490mm	5"Covered Castors	4pcs
Table Height Max.	890mm	Hydraulic Pedal	2 sets

Gynecological Table

A046

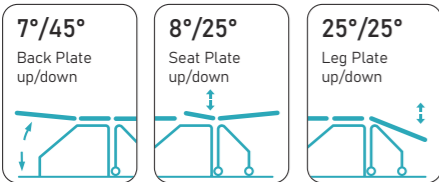


Technical Parameters Technical Configuration

External Length	1940mm	Hydraulic Pump	1pc
External Width	700mm	Adjustable Air Spring	2pcs
Table Height Min.	490mm	5" Covered Castors	4pcs
Table Height Max.	890mm	Hydraulic Pedal	2 sets

Electric Examination Table

X36

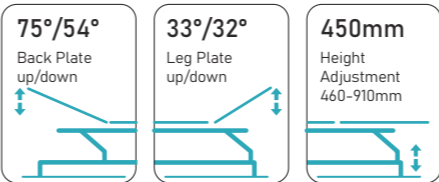

Technical Parameters Technical Configuration

External Length	1890mm	Pillow	1pc
External Width	860mm	Motor	1pc
Table Height Min.	460mm	Gas Spring	2pcs
Table Height Max.	910mm	3" Casters	4pcs
		Brake Pedal	4pcs
		Hand Controller	1pc
		Manual Operator	1pc

Surgical light



CODE NO.: 700/500 LED

Technical Parameters	700mm head	500mm head
Illuminance(Lux)	≥160,000lux	≥140,000lux
Total Power Consumption	80W	60W
Total irradiance	544W/m²	534W/m²
Total LED bulb quantity	108pcs	72pcs
Ultraviolet light irradiance within40nm wave	0.3W/m²	0.4W/m²
50% Spot Diameter (D50)	55%	51%
10%Spot Diameter (D10)	291 mm	268 mm
Color temperature	3800±500K,4400±500K,5000±500K	
Depth Of Illuminance	1400mm	
The adjusting range of Illumination%	25~100%	
Light Focus adjustment System	Manual	
Terperature at surgeon's head	≤ 1°C	
CRI RA	93	
Service life of illuminant	50,000h	
Battery	optional	
Size og light field	250-330mm	
Power supply voltage	AC110-240V 50/60Hz	
Best height of installation	2900mm	

Surgical light



CODE NO.:HF-L3+4C LED-TV

Technical Parameters	HF-L3+4C LED-TV
Illuminance(Lux)	≥140,000lux/≥160,000lux
Color temperature	3500±300K,4000±300K,4500±300K,5000±300K
Colour reduction index(Ra)	96
Colour reduction index	R9:97
Colour reduction index	R13:98
Total irradiance	380W/m²/380W/m²
Size of light field	120-250mm
Service life of illuminant	≥50,000h
Power supply voltage	AC110-240V,50/60Hz
Best height of installation	2900mm
Total Power Consumption	90W
Total LED bulb quantity	187pcs
Green ENDO	YES
Dimming Type	Analog dimming
Depth Of Illuminance	1000mm
Light Focus adjustment System	Manual
Terperature at surgeon's head	≤ 1°C
Color	White+dark gray
LED brand	OSRAM
Material	aluminium alloy+PC

Surgical light

Shadowless Lamp & Hanging Tower



CODE NO.:HF-L3+5 LED-TV

Technical Parameters	HF-L3+5 LED-TV
Illuminance(Lux)	≥120,000Lux / ≥140,000Lux
Color temperature	3800±200K,4000±200K,4500±200K,5000±200K
Colour reduction index(Ra)	96
Depth Of Illuminance	1045mm/1170mm
Lamp head diameter	700mm/860mm
Total irradiance	127W/m² /130W/m²
Size of light field	220-310mm
Service life of illuminant	≥50,000h
Power supply voltage	AC110-240V,50/60Hz
Best height of installation	2900mm
Total Power Consumption	140W
Total LED bulb quantity	295pcs
Green ENDO	YES
Rated power of bulb	3.2V/1W
Light Focus adjustment System	Manual
Terperature at surgeon's head	≤ 1°C
Battery	optional

Operating lamp



CODE NO.:SY01-LED3A

Technical Parameters	SY01-LED3A (color temperature adjustable)
Illuminance(Lux)	≥120,000Lux
Color temperature	3800±200K,4000±200K,4500±200K,5000±200K
Colour reduction index(Ra)	96
Depth Of Illuminance	1045mm
Total irradiance	127W/m²
Size of light field	220-310mm
Lamp head diameter	700mm
Rated power of bulb	3.2V/1W
Service life of illuminant	≥50.000h
power supply voltage	AC110V-240V,50HZ-60HZ
Best height of installation	2900mm
ENDO	YES
Light Focus adjustment System	Manual
Terperature at surgeon's head	≤ 1°C
Total Power Consumption	60W
Battery	optional
Total LED bulb quantity	110pcs

Shadowless Lamp & Hanging Tower

Operating lamp



CODE NO.:SY02-LED3D

Technical Parameters	SY02-LED3D
Illuminance(Lux)	≥150,000Lux
Color temperature	4500±300K
Colour reduction index(Ra)	96
Depth Of Illuminance	1045mm
Total irradiance	127W/m²
Size of light field	220-310mm
Lamp head diameter	700mm
Rated power of bulb	3.2V/1W
Service life of illuminant	≥50.000h
power supply voltage	AC110V-240V,50HZ-60HZ
Best height of installation	2900mm
ENDO	YES
Light Focus adjustment System	Manual
Terperature at surgeon's head	≤ 1°C
Total Power Consumption	60W
Battery	optional
Total LED bulb quantity	111pcs

Operating lamp



CODE NO.: YD01-IE LED

Technical Parameters	YD01-IE IED
Illuminance	≥25,000Lux
Colour temperature	4800±500k
Colour reduction index(Ra)	93
Total irradiance	480W/m²
Power supply voltage	AC220/50-60Hz(110V/60Hz custom-made)
Rated power of bulb(V/W)	3.2V/1W
Bulb	LED Bulb ≥30,000h
Emergency time	≥6 hours
Power Frequency	50Hz±1Hz
Input power	27VA

Operating lamp



CODE NO.:ZF600

Technical Parameters	ZF500	ZF600	ZF700
Illuminance	≥100,000Lux	≥120,000Lux	≥150,000Lux
Total irradiance	466W/m²	426W/m²	580W/m²
Colour temperature	4500±500K		
Colour reduction index(Ra)	88-95		
Illuminance depth	1200mm		
Size of light field	140-210mm		
Rated power of bulb	150W		
Service life of illuminant	≥1.000h		
Power supply voltage	AC110-240V,50/60Hz		
Brightness adjustment	Automatic8-stage continuous light adjustment		
Shift of major and stand by lamps	Automatic		
Best height of installation	2900mm		

Operating lamp



CODE NO.:ZF500E

CODE NO.:ZF600E

CODE NO.:ZF700E

Technical Parameters	ZF500E	ZF600E	ZF700E
Colour reduction index(Ra)	93	94	94
Total irradiance	466W/m²	426W/m²	580W/m²
Illuminance	≥100,000Lux	≥120,000Lux	≥150,000Lux
Colour temperature	4500±500K		
Illuminance depth	≥1000mm		
Size of light field	160-280mm		
Rated power of bulb	150W		
Service life of illuminant	≥1.000h		
Power supply voltage	AC110-240V,50/60Hz		
Shift of major and stand by lamps	Automatic		
Emergency time	2 hours		

Operating lamp



CODE NO.:ZF700 700-TV

Technical Parameters	ZF700 700-TV
Illuminance	≥150,000Lux/≥150,000Lux
Colour temperature	4500±500K
Colour reduction index(Ra)	94
Illuminance depth	1200mm
Total irradiance	580W/m²
The ratio between irradiance and illuminance	3.3mW/m² lx
Size of light field	140-210mm
Rated power of bulb	150W/150W
Service life of illuminant	≥1.000h
Power supply voltage	AC110-240V,50/60Hz
Shift of major and stand by lamps	Automatic
Best height of installation	2900mm
Effective pixels	2.38 Mega Pixels
Digital zoom	12x(120 x with optical zoom)
Optical zoom	10x
Lens focus	f=3.8mm(wide)to 38mm(tele)
F value	F1.8 to F3.4
Best Imaging of illuminance	100Lx-10000Lx
S/N Ratio	>50dB
Dimensions(W*X*D)	45.6mm*48.8mm*78mm
Weight approx	210g

Single-arm Mechanical Surgical Tower



LK-G13

- 1.Operating power: AC220V, 50Hz;
- 2.Moving range of the arm (radius): 700-1100mm (or customized)
- 3.Rotation angle of the terminal box: 0~340°
- 4.Net load weight ≤ 60kg;
- 5.Instrument deck: 2 layers(height adjustable) 550x400x30mm; 10×25mm side rail of international standard for protection with round corner;
- 6.Gas interface configuration: 2 for oxygen, 2 for suction, 2 for air
 - different colors and shapes, with mis-connection prevention function;
 - lifetime durability: over 20,000 times plug/unplug;
- 7.Power sockets: 7, 220V, 10A; network interface: 1;
- 8.Grounding terminals: 2
- 9.Stainless steel adjustable infusion rod holder: 1;
- 10.Stainless steel adjustable injection pump rack:1;
- 11.The main material is high-strength aluminum alloy profile;
- 12.Electrostatic spraying finish on surface;
- 13.Ceiling-mounted, stable and steady.

Double-arm Mechanical Surgical Tower



LK-G12

- 1.High strength aluminum alloy body in streamlined shape;
- 2.The surface coating treatment by imported material, with excellent anti-corrosion performance and easy to clean.
- 3.Equipped with mechanical brakes, the transverse arm and terminal box can be rotated respectively or simultaneously in horizontal direction, to ensure no drifting of the machine in 24 hours, easy to handle and with accurate positioning.
- 4.multilateral combination of box, arbitrary layout of gas and electric terminals.
- 5.Gas terminals of well-known brand, different color and shape of the interface for easy identification, with standby and mis-connection prevention function.
- 6.The gas terminals can be used for more than 20000 times, and maintained without cut off gas power.
- 7.1:1 set of multi-functional lifting box column (high strength aluminum alloy profile) : box length 800mm, rotation Angle $\leq 340^\circ$, equipped with pneumatic braking positioning system, the length of the rotative transverse arm 800+600mm.

Dry-wet Separation Suspension Bridge



LK-G01

- 1.Working power supply: AC220V, 50Hz; Input power :6KVA;
- 2.The bridge length is 3500 ~ 4500mm (the actual size subjected to user space); 2 lights;
- 3.Dry section tower: 1 (left and right moving distance 500mm).
Each dry tower is configured as follows:
-Instrument platform: 3 layers (adjustable height), round corner anti-collision design;
-Standard configuration of gas terminals: 1 oxygen, 2 compressed air;
-different colors and shapes, with prevention function for faulty connection;
-lifetime durability: over 20,000 times plug/unplug;
-double seals and three positions (on, off, pull), maintenance without cut off gas power;
- 4.Power sockets: 6, 220V, 10A;
- 5.Rotation Angle: 0 ~ 340°;
- 6.Brake system;
- 7.Ground terminal: 2;
- 8.RJ45 network ports: 1;
- 9.Drawer: 1;
- 10.Load capacity of tower in dry section: 70 ~ 150kg;
- 11.All gas terminals, power ports, and low voltage electrical ports are placed on the terminal tank, separating electrical power from gas. Power and air sources are mounted on side of the tower separately.

Emergency Cart

Emergency Cart



ET750



ET760

- 1.Suitable for medical, hospital, military application use.
- 2.Aluminum, steel and ABS engineering plastic structure.
- 3.Push handle on both sides, concave designed table to prevent items from sliding,with stainless steel guardrail and transparent soft mat.
- 4.A wide range of accessories: Defibrillator shelf, CPR board, Secondary table, Side basket, Disposal needle container, Wastebasket, IV pole, Durable silent wheels, Power socket board, Oxygen cylinder base, Heavy load capacity shelf etc.
- 5. Size 750x480x930mm



ET625

- 1.Suitable for medical, hospital, military application use.
- 2.Aluminum, steel and ABS engineering plastic structure.
- 3.Concave designed table to prevent items from sliding,with stainless steel guardrail and transparent soft mat.
- 4.A wide range of accessories: Defibrillator shelf, CPR board, Secondary table, Side basket, Disposal needle container, Wastebasket, IV pole, Durable silent wheels, Power socket board, Oxygen cylinder base, Heavy load capacity shelf etc.
- 5. Size 625x480x930mm

Anesthesia Cart



AT750



AT760

- 1.Suitable for medical, hospital, military application use.
- 2.Aluminum, steel and ABS engineering plastic structure.
- 3.Push handle on both sides, concave designed table to prevent items from sliding,with stainless steel guardrail and transparent soft mat.
- 4.A wide range of accessories: Drug containers, Bottle holder, Secondary table, Disposal needle container, Wastebasket, Durable silent wheels, Heavy load capacity shelf etc.
- 5. Size 750x480x930mm



AT625

- 1.Suitable for medical, hospital, military application use.
- 2.Aluminum, steel and ABS engineering plastic structure.
- 3.Concave designed table to prevent items from sliding,with stainless steel guardrail and transparent soft mat.
- 4.A wide range of accessories: Drug containers, Bottle holder, Secondary table, Disposal needle container, Wastebasket, Durable silent wheels, Heavy load capacity shelf etc.
- 5. Size 625x480x930mm

Emergency Cart

Medication Cart



MT750

- 1.Suitable for medical, hospital, military application use.
- 2.Aluminum, steel and ABS engineering plastic structure.
- 3.Push handle on both sides, concave designed table to prevent items from sliding,with stainless steel guardrail and transparent soft mat.
- 4.A wide range of accessories: Secondary table, Bottle holder, Wastebasket, Durable silent wheels, Heavy load capacity shelf etc.
- 5. Size 750x480x930mm



MT760

Infusion Cart

ITT750

- 1.Suitable for medical, hospital, military application use.
- 2.Aluminum, steel and ABS engineering plastic structure.
- 3.Push handle on both sides, concave designed table to prevent items from sliding,with stainless steel guardrail and transparent soft mat.
- 4.A wide range of accessories: Secondary table, Bottle holder, Side basket, Wastebasket, IV pole with 10 hooks, Disposal needle container, Durable silent wheels, Heavy load capacity shelf etc.
- 5. Size 750x480x930mm



MT625

- 1.Suitable for medical, hospital, military application use.
- 2.Aluminum, steel and ABS engineering plastic structure.
- 3.Concave designed table to prevent items from sliding,with stainless steel guardrail and transparent soft mat.
- 4.A wide range of accessories: Secondary table, Bottle holder, Wastebasket, Durable silent wheels, Heavy load capacity shelf etc.
- 5. Size 625x480x930mm



ITT625

- 1.Suitable for medical, hospital, military application use.
- 2.Aluminum, steel and ABS engineering plastic structure.
- 3.Concave designed table to prevent items from sliding,with stainless steel guardrail and transparent soft mat.
- 4.A wide range of accessories: Secondary table, Bottle holder, Side basket, Wastebasket, IV pole with 10 hooks, Disposal needle container, Durable silent wheels, Heavy load capacity shelf etc.
- 5. Size 625x480x930mm

Treatment Cart

CT750

- 1.Suitable for medical, hospital, military application use.
- 2.Aluminum, steel and ABS engineering plastic structure.
- 3.Push handle on both sides, concave designed table to prevent items from sliding,with stainless steel guardrail and transparent soft mat.
- 4.A wide range of accessories: Secondary table, Bottle holder, Wastebasket, Disposal needle container, Durable silent wheels, Heavy load capacity shelf etc.
5. Size 750x480x930mm



Computer Cart

BJB00

- 1.Highly integrated computer and power cart solution for medical applications.
- 2.12kg load capacity with pneumatic spring height adjustment.
- 3.Aluminum alloy worktable and support, two-way keyboard holder and mouse bracket, fit for both right/left hand.
- 4.Durable silent wheels, 2pcs with brakes.
- 5.Height from 780-1030mm



CT625

- 1.Suitable for medical, hospital, military application use.
- 2.Aluminum, steel and ABS engineering plastic structure.
- 3.Concave designed table to prevent items from sliding, with stainless steel guardrail and transparent soft mat.
- 4.A wide range of accessories:Bottle holder, Wastebasket, Disposal needle container, Durable silent wheels, Heavy load capacity shelf etc.
5. Size 625x480x930mm



BJB01

- 1.Highly integrated computer and power cart solution for medical applications.
- 2.12kg load capacity with pneumatic spring height adjustment.
- 3.Aluminum alloy worktable and support, two-way keyboard holder and mouse bracket, fit for both right/left hand.
- 4.Computer storage drawer.
- 5.Durable silent wheels, 2pcs with brakes.
- 6.Height from 780-1030mm



ABS Bedside Table

SKS002

Size: 480x480x870mm
Durable ABS material construction, no toxic, strong and anti corrosion, easy to clean.
Hidden towel hook at side.
With a shelf, a drawer and a cabinet.



Solid Wood Bedside Table

SKS020

Size: 500x430x650mm
Material: MDF board
Two drawers+one cabinet
Adjustable towel hangers on the sides of cabinet



Phenolic Resin Bedside Table

SKS025

Size: 475x485x810mm
Aluminum alloy and phenolic resin material.
With a drawer and a single door cabinet.
With 4pcs 3" double side casters, anti-static, water-proof and anti-bacterial.



ABS Bedside Table

SKS003

Size: 480x480x870mm
Durable ABS material construction.
Hidden towel hangers on two sides of cabinet.
Hidden dinning borad between drawer and tabletop.
With shoes holder and four wheels.



Steel Bedside Table

SKS005

Size: 495x400x790mm
Powder coated steel frame and ABS top.
Adjustable towel hangers on two sides of cabinet.
With four wheels



ABS Bedside Table

SKS008

Size: 500x510x705mm
Durable ABS material construction.
Adjustable towel hangers on two sides of cabinet.
Hidden dinning borad between drawer and tabletop.
With four wheels.



ABS Bedside Table

SKS013-1

Size: 480x460x760mm
Durable ABS material construction.
Adjustable towel hangers on two sides of cabinet.
With four wheels.



Medical Record Trolley

SKR021-8

Size: 750x410x950mm
Powder coated steel frame with durable ABS material construction.
Central lock system.
With 50 holders for case record in 2 column.
One drawer with height 115mm.
With four wheels.



Medical Record Trolley

SKR022

Size: 450x410x950mm
Powder coated steel frame with durable ABS material construction.
Central lock system.
With 25 holders for case record.
One drawer with height 115mm.
With four wheels.



Dressing Trolley

SKH029

Size: 670x450x900mm
Complete stainless steel body.
Two stainless steel Shelves, two drawers with lock,
drawer size: 100x280x350mm.
Push handle at the right side.
Guardrails on three sides of top table and bottom tray.
With one dustbin.
3" covered casters x 4, two with brakes.



Anesthesia Trolley

SKH018

Size: 600x400x850mm
Complete stainless steel body.
One drawer and inner cabinet without shelf.
Guardrails on three sides of top table.
3" covered casters x 4, two with brakes.



Infusion Treatment Trolley

SKH032

Size: 670x450x1700mm (with hook)
Complete stainless steel body.
Two stainless steel shelves, one with big drawer.
IV pole at back with 10 bottle hooks.
Guardrails on three sides of top table and bottom tray.
3" covered casters x 4, two with brakes.



Stainless Steel Trolley for Medical Record Holder

SKH014

Size: 340x400x900mm
Complete stainless steel body.
With central lock system and 20 holders for case record.
With four wheels.



Four-layer Shelf

SKH078

Size: 1200x600x1800mm
Complete stainless steel body.
4 shelves, each shelf with load capacity of 150kg.



Stainless Steel Oxygen Bottle Trolley

SKH048

Size: 1435x360x1040mm
Cylinder Trolley (Push Type) with two casters, dia. 100mm, with
M.S body frame.
Suitable for gas cylinders



Stainless Steel Swab Stand

SKH088

Size: 900x500x1500mm
Stainless Steel Swab Stand with forty spikes(4x10).
Each bar with 10 spikes, stainless steel drip tray at base.
With four wheels.



Stainless Steel Washing Sink

SKH036

Complete stainless steel body.
Two inductive taps for two person use at the same time.
Automatic tap with human movement control.
Ariston Thermo assures reliable hot water supplying.
Electric input: AC220V, 50Hz.
Size available: 1000x630x1350mm; 1600x630x1350mm;
2000x630x1350mm; 2400x630x1350mm.



Stainless Steel Wash Basin

SKH041

Stainless steel body with plastic base.
Adjustable height range from 810 - 1300mm.
Stainless steel basin dia. 300mm.
With 5 casters.



Stainless Steel Mayo Trolley

SKH038-2

Size: 500x350x(870-1300)mm
Stainless steel material.
Adjustable height range from 870 - 1300mm.
With a stainless steel tray in size 500x400x25mm.
Four Casters with break



Instrument Trolley

SKH006

Size: 670x450x900mm
Complete stainless steel body.
Two shelves with guardrail at three sides.
Push handle at both side.
With 4pcs 3" covered casters, two with brakes.



Fan-shaped Instrument Trolley

SKH005

Size: 1550x460x900mm
Complete stainless steel body.
Two shelves with guardrail at three sides.
With 4pcs 3" covered casters, two with brakes.



Electric Two Function Dialysis Chair

SKE-135

Total size:1800×550mm / Back size: 780×590mm / Seat size: 480×550mm
Ergonomic designed with eco-friendly PU synthetic leather, easy to clean.
2 Functions, backrest & legrest.
Adjustable back and leg, easy to transfer chair position to bed position.
Upgraded armrest, adjustable at 4 horizontal directions.
Ergonomics designed removable pillow.
Adjustable ABS tray table, with convex edge, cup and cellphone container.
Optional choice for USB/5V socket.
Mattress thickness 60mm
Back rest lifting range: -10° - 70° / Leg rest lifting range: -70° - 0°
Armrest swing out 0°-270°
Voltage and frequency: 100-240 V · 50/60 Hz
4pcs 3" silent casters



Reclining Chair

SKE087

Seat position size: 820x850x1070mm / Bed position size: 820x1600x450mm
Ergonomic designed with eco-friendly PU synthetic leather, easy to clean.
2 Functions, backrest & legrest.
Adjustable back and leg, easy to transfer chair position to bed position.
Back rest lifting range: 0° - 70°
Leg rest lifting range: 0°~ 90°
Maxium load capacity: 250kg
4pcs 3" silent casters



Electric Three Function Dialysis Chair

SKE-133

Total size:2000×580mm / Back size: 770×580mm / Seat size: 470×580mm
Ergonomic designed with eco-friendly PU synthetic leather, easy to clean.
Quick release back system for CPR emergency.
Adjustable ABS tray table, with convex edge, cup and cellphone container.
Adjustable seat height from 550-700mm
With a small dinning table.
Mattress thickness 60mm
Back rest lifting range: -8° - 70° / Leg rest lifting range: -60° - 0°
Armrest swing out 0°-270°
Voltage and frequency: 100-240 V · 50/60 Hz
With CPR
4pcs 3" silent casters



Blood Donation Chair

SKE091

Seat position size: 560x1030x1200mm
 Bed position size: 560x1650x470mm
 Ergonomic designed with eco-friendly PU synthetic leather, easy to clean.
 Durable epoxy painting, anti-bacterial.
 Paint thickness 0.12mm, brightness 60°, paint can resist 50kg impact.
 2 functions, backrest & legrest.
 Adjustable back and leg, easy to transfer chair position to bed position.
 Seat height 550mm.
 Back-rest adjustment range: 0-70°
 Leg-rest down fold: 0-90°
 Armrests 2pcs
 Anti-slip feet cover 4pcs



Blood Donation Chair

SKE090

1.size: 650*800*450mm
 2.Material: The frame is made of carbon steel bend pipe, excellent drug resistance, maintenance-free, low construction difficulty, green environmental protection and pollution-free.
 3.The seat board, backboard and armrest are covered with 20mm sponge and high-quality artificial leather. The sponge has good resilience and is comfortable and beautiful. There is a glove box under the left armrest for medical supplies.
 Armrests 2pcs
 Anti-slip feet cover 4pcs



Transfusion Chair

SKE004-1

Thick seat cushion to accompany the stool, the seat surface is flexible cushion, high comfort, small size, easy to move
 Seat size (LxWxH) 670x800x1050mm
 Anti-slip feet cover 4pcs
 Wooden armrests 2pcs
 IV pole previsions 2pcs
 IV pole 1set



Transfusion Chair

SKE005

Seat size (LxWxH) 750x1000x1050mm
 Bed size 750x1550x450mm
 Anti-slip feet cover 4pcs
 Wooden armrests 2pcs
 IV pole previsions 2pcs
 IV pole 1set
 Utility basket 1pc



Attendant Chair

SKE001

the chair can be adjusted as needed, convenient to attend the needs of patient, can be used as a sitting chair.
 Seat size (LxWxH) 640x720x940 mm
 Bed size (LxWxH) 640x1900x420 mm
 Arm 1set
 2" Casters 4pcs
 3" Casters 2pcs
 Anti-slip feet cover 4pcs
 Pillow 1pc



Luxury Attendant Chair

SKE001-3

the chair can be adjusted as needed, convenient to attend the needs of patient, can be used as a sitting chair.
 Seat size (LxWxH) 710x760x950mm
 Bed size (LxWxH) 710x1940x420mm
 Wood armrest frame 1set
 2" Casters 2pcs
 Anti-slip feet cover 2pcs
 Pillow 1pc



Luxury Attendant Sofa

SKE014-5

the chair can be adjusted as needed,
convenient to attend the needs of
patient, can be used as a sitting chair.
Seat size (LxWxH) 900×900×650 mm
Bed size (LxWxH) 1900×900×500 mm



Accompany Chair

SKE001-5

Ergonomic design, stylish and comfortable; the chair can be
adjusted as needed, convenient to attend the needs of patient,
can be used as a sitting chair.
External size 650×2060×450mm
Seat size 780×650×450mm(backrest height: 1060mm)
Safe working load 200kg



Over Bed Table

SKH046-1

Size: 870-1020x350x28mm
ABS table top with cup socket.
Adustable length to fit different bed size.



Over Bed Table

SKH046-11

Table top is made of phenolic resin laminate
U type base is made of powder coated steel, can be used in
combination with bedside cabinets
Height adjustment by gas spring, used single-handed according to
the convenience of the user
With four noiseless castors, 2 inch diameter, two with brakes
Great resistance to impacts and scratches.
Overbed table
Can be different colors to match beds
External size (LxWxH) 800×395×855-1155mm
Air spring for height adjustment 1pc
Phenolic resin table top 1pc



Over Bed Table

SKH046-2

The gas spring system help the table cover moving up and down
The height would be adjusted by the black switcher as follows,
the rage is 770-1050mm
4 casters made by rubber and could revolve around,
ABS table cover
Powder coated steel stand
The material are ABS and powder coated steel
Overbed table
Can be different colors to match beds
Table top is made of HDPE, easy clean.
With four noiseless castors, 2 inch diameter, two with brakes



Over Bed Table

SKH042

The gas spring system help the table cover moving up
and down
The height would be adjusted by the black switcher as
follows,the rage is 770-1050mm
Overbed table
With four noiseless castors, 2 inch diameter, two with
brakes
External Size (LxWxH) 800x410x(730-1130)mm
Air Spring for Height Adjustment 1pc
MDF Table Top 1pc



Stair Stretcher

SKB1C10

Full size: 1230x500x1600mm / Folded size: 1020x550x210mm
Ergonomic designed, simple structure, easy operation, reliable and secure.
Widely used for emergency evacuation in home, hospital and school etc.
High strength aluminum alloy, foldable stretcher, compact and lightweight, easy to carry.
Durable epoxy painting, anti-bacterial.
With LED light, LCD power display for easy operation in dark place.
Can climb up and down stairs and move on the ground as manual wheelchair.
With strong grip track, prevent slide or fall down when stop on the stairs.
Adjustable backrest height and foldable stretcher, easy for carrying and storage.
PU sponge mattress with adjustable backrest and detachable pillow.
Powered by a 24V, 200W brushless motor, with detachable battery.
With vest type, metal buckle straps, to ensure the safety during transport.
With 4 wear-resistant rubber wheels.



Stair Stretcher

SKB1C01-1

The stretcher is mainly used for high building's lift carrying patients. Only one person can operate this stretcher
It has four wheels and will be easy for moving on ground
The stretcher approves the patient's safety during transport process with two pieces of belts
It is made aluminum alloy materials. It characterized by its being light-weight, small-sized, easy-carried, use-safely and easy for sterilization and clean
Unfolding size (L x W x H) 850 x 520 x 1370mm
Folding size (L x W x H) 1100 x 540 x 180cm
Load bearing ≤159kg
Weight 10kg



Home Care / VIP Bed

H6k

Size: 2080x1000x(460-710)mm / Mattress platform size: 1925*830mm
Wood bed ends with soft leather upholstery
Aluminum alloy side rail, foldable with safe lock.
Double auto-regression function for bed platform.
Super-low bed position 360mm.
Back-rest adjustment: 0-75°(±10°)
Knee-rest adjustment: 0-35°(±10°)
Linear motor 3pcs
6" Durable TPR tire with anti-winding hard shell, central locking x 4pcs



Wheelchair

KJT112

Design: Aluminum alloy drop back handle
Front wheel: 8- inch Rear wheel: 24- inch
Wheel: Conging PU wheel and anti- tippers
Seat height/width/deepth: 40*46*40cm
Overall size: 106*(30- 64)*95cm
Armrest: Flip up armrest
Footrest: Detachable footrest
Load capacity: 100kg



Wheelchair

KJT605

Frame: Chrome- covered frame
Front wheel: 8- inch Rear wheel: 24- _inch
Seat height/wid/deepth: 42*46*40cm
Overall size : 102*(25- -63)*91cm
Armrest: Flip up armrest
Footrest: Detachable footrest
Brake: Double brakes
Load capacity: 100kg



Wheelchair

DW-WC08

Material: Aliminum alloy
Front wheel: 6- inch Rear wheel: 12- -inch
Seat height/width/deepth: 44*41*40cm
Seat height from the ground: 48cm
Overall size : 91.5*55*88cm
Brake: Self- Hocking brake



Wheelchair

M239-12F

Material: Aliminum aloy
Design: Foldable and portable
Front wheel: 6-inch
Rear wheel: 12-inch
Seat height/width: 47*40cm
Overall size : 90*53*93cm
Fold size : 79*53*30cm
Flip up armrest and foot support
Load capacity: 100kg



Wheelchair

C295-WC01

Scientific design, ergonomics, simple structure,
Material: Aliminum alloy
Front wheel: 7- inch
Rear wheel: 12- inch
Seat height/width: 50*41cm
Overall size : 90*50*94cm
Fold size : 34*80cm
Brake: Hand brakes and wheel brakes
Load capacity: 100kg



Wheelchair

C295-WC02

Material: Aliminum lloy
Front wheel: 7-inch Rear wheel: 12 -inch
Seat height/idth: 48*42cm
Overall size : 92*55*(96-102)cm
Fold size : 50*97cm
Brake: Hand brakes and wheel brakes
Load capacity: 100kg



Children Electric Wheelchair

DW-703

Material: Aliminum alloy
Front wheel: 8- inch
Rear wheel: 12- inch
Seat height/width/depth: 39.5*35*43cm
Overall size: 105*59*90cm
Fold size: 106*62.5*76.5cm
Motor: 250W*2pcs
Climbing angle: 6°
Battery: 12V 12AH/20AH lithium battery



Electric Wheelchair

DW-710

Material: Aliminum lloy
Front wheel: 7 -inch Rear wheel: 10 -inch
Seat height/width/depth: 52*42*41cm
Total size: 98*55*94cm
Capacity: 100kg Motor: 180W*2pcs
Battery: 24V 6AH lithium battery
Driving range: 12km



Electric Wheelchair

DW-605J

Material: Aluminum alloy
Driving range: 18-30km
Battery: 24V 12AH/20AH lithium battery
Loading capacity: 100kg
Speed: 6KM/h
Overall size : 980*600*950mm
Fold size : 800*600*400mm
Seat size : 445*460mm
Parking brake : Electromagnetic brake,flexible parking



PC ECG / ECG WORK SATATION

CV200

- 1.Windows based Rest ECG analysis system
- 2.Simultaneous 12 lchannel ECG measurement and analysis
- 3.Measurement and analysis of QT and QTc dispersion
4. Frequency-domain ECG analysis
- 5.Vactor ECG analysis
- 6.Time vactor ECG and Centripetal ECG
- 7.Ventricular late potential analysis
- 8.High-frequency ECG
- 9.Heart rate variability analysis
- 10.RT interval variability analysis



Bluetooth ECG for Android

iCV200

- 1.Android based rest ECG analysis application
- 2.Bluetooth connection
- 3.Portable
- 4.10s-1h ECG recording
- 5.Simultaneous 12 channel ECG measurement and analysis
- 6.Antomatic interpretation
- 7.Printing by thermal printer (bluetooth)
- 8.Report in PNG / PDF emailing, sharing to real time communication Apps / network drives
- 9.ECG network



Bluetooth ECG for iOS

iCV200(BLE)

- 1.iOS based ECG analysis application
- 2.Low power bluetooth 5.0 communication
- 3.Light weight, small size and portable
- 4.Simultaneous 12 channel ECG measurement and analysis
- 5.Two fingers' measurement of ECG (Patent)
- 6.Comparison of of 2 ECGs on the same screen
- 7.Doctor's handwriting signature
- 8Automatic interpretation
- 9.A4 printing by air printer (WiFi)
- 10.Report in JPG / PDF emailing, sharing to real time communication Apps / network drives
- 11.ECG network



Bluetooth ECG for iOS

iCV200S

- 1.iOS based ECG analysis application
- 2.Low power bluetooth 5.0 communication
- 3.New apperance design, 3 colors available, portable
- 4.Real time indication of leads connection status
- 5.Simultaneous 12 channel ECG measurement and analysis
- 6.Two fingers' measurement of ECG (Patent)
- 7.Comparison of of 2 ECGs on the same screen
- 8Automatic interpretation
- 9.A4 printing by air printer (WiFi)
- 10.Report in JPG / PDF emailing, sharing to real time
- 11.communication Apps / network drives
- 12.ECG network



Stress Test ECG

CV1200

- 1.Windows based stress test ECG analysis system
- 2.Digital synchronous A/D (Patent)
- 3.VH proprietary algorithm: Minimum delay baseline wander eraser
- 4.Different filters selectable: LP, HP and artifact filters
- 5.Skin-electrode impedance measurement
- 6.Soft anti-aliased ECG display
- 7.Preset classical protocols and unlimited user defined protocols
- 8.Arrhythmia detect and live review
- 9.Warning and recovery mode for automatic arrhythmias and myocardial ischemia



Bluetooth Stress test ECG

iCV1200

- 1.Windows based stress test ECG analysis system
- 2.Bluetooth communication
- 3.Digital synchronous A/D (Patent)
- 4.VH proprietary algorithm: Minimum delay baseline wander eraser
- 5.Different filters selectable: LP, HP and artifact filters
- 6.Skin-electrode impedance measurement
- 7.Soft anti-aliased ECG display
- 8.Preset classical protocols and unlimited user defined protocols
- 9.Arrhythmia detect and live review
- 10.Warning and recovery mode for automatic arrhythmias and myocardial ischemia
- 11.Synchronous display of ECG,BP,SpO2, METs, VO2max, exercise distance/time



Holter ECG

CV3000

- 1.Windows based holter ECG analysis system
- 2.Duplex data access: removeable SD card and USB
- 3.Automatic Duplex Operation: standard 12-lead (10-wire cable) and 3-channel (5-wire cable or 7-wire cable)
- 4.Small size and light wight, comfortable to wear
- 5.Real time ECG display (LCD)
- 6.Events markable
- 7.Independent pacemaker channel
- 8.Anti-defibrillation protection
- 9.24-72 hours recording, up to 7 days with 3CH
- 1 AAA battery powered, compatible with rechargeable batteries



Hydrogen Peroxide Low Temperature Plasma Sterilizer

HTYD-120LA

For use of sterilization of medical devices and surgical instruments.

H2O2 gas plasma sterilization with safety and effectiveness.

H2O2 acts as an oxidising agent to kill microorganisms through oxidation of their key cellular components.

Sterilizable articles and materials:

Hysteroscopy, laparoscopy. Laryngoscope, probe, rigid endoscope, flexible endoscope, ophthalmic lens fiber optic cable, intracranial sensor, cold therapy probe, prostatectomy, esophageal dilator, electric cautery equipment defibrillation motor, laser head. Metal, glass, silicone, rubber, etc.

Power supply AC380V/50HZ, power 3.2kw, chamber capacity 128L.



Ethylene Oxide Sterilizer

HTY-200L

For use of sterilization of a wide range of moisture or heat sensitive materials that not compatible with other methods of sterilization.

Ethylene oxide is an alkylating agent that disrupts cellular metabolism and reproductive processes of microorganisms. It is also a very active chemical disinfectant, which not only achieves broad-spectrum sterilization, but also reliable sterilization.

Power supply AC220V/50HZ, chamber capacity 200L.



Pulsating Vacuum Sterilizer

HTYM-0.36

Designed and manufactured combines high capacity with cost-efficiency.
Offering high operating reliability and easy maintenance.
The chamber accords with the requirements of pressure vessel standard.
Mainly used in pharmaceutical or hospital to sterilie the clothes,tools and liquid media.
Double wall design with inner stainless steel and outer high-quality pressure vessel steel.
Power supply AC220V/50HZ, chamber capacity 240L.



Dry Heat Sterilizer

HTYB-30

Using high-velocity and hot air to kill microorganisms and spores without the need of water or steam.
Ideal for heat-resistant materials such as glassware, metal instruments, and powders.
Easy to use, safety and time saving. The sterilization process takes only 8-12 minutes.
Automatic control with temperature display screen.
Stable heat radiation in chamber during sterilization.
Quick recovery of temperature between repeat processes.
Automatic process with sound indication, no manpower needed.
Power supply AC220V/50HZ, chamber capacity 36L.



Table Sterilizer

DGT-18Z

High quality stainless steel chamber with seal cover.
Automatic door structure.
Digital display of working status, touch type key.
Automatically shut off with beep reminding after sterilization.
Built-in steam generator provides fast saturated steam.
Safety interlocking system with automatic protection for over temperature, overpressure and low water level.
Open top water tank.
Automatic discharge of cold air and steam after each use.
Built-in printer and USB port for sterilization status data print or output.
Power supply AC220V/50HZ, power 2.2kw, tank capacity 18L.



Horizontal Steam Sterilizer

WDZX-200KC

Fully stainless steel structure.
Hand wheel type of quick-open door structure.
Digital display of working status, touch type key.
Automatically shut off with beep reminding after sterilization.
Electric heated.
Scope of sterilization temperature (50℃-134℃)
Scope of sterilization time(0-99 hours)
Tank thickness:3.0mm
Power supply AC380V/50HZ, power 9kw, tank capacity 220L.



Vertical Pressure Steam Sterilizer

LDZH-100KBS

- Fully stainless steel structure.
- Hand wheel type of quick-open door structure.
- Digital display of working status, touch type key.
- Automatically shut off with beep reminding after sterilization.
- Electric heated.
- Scope of sterilization temperature (50℃-134℃)
- Scope of sterilization time(0-99 hours)
- Tank thickness:2.0mm
- Power supply AC380V/50HZ, power 6kw, tank capacity 98L.



Portable Pressure Steam Sterilizer

DSX-280KB24

- Fully stainless steel structure.
- Hand wheel type of quick-open door structure.
- Digital display of working status, touch type key.
- Automatically shut off with beep reminding after sterilization.
- Electric heated.
- Scope of sterilization temperature (50℃-126℃)
- Scope of sterilization time(0-99 hours)
- Tank thickness:2.0mm
- Power supply AC220V/50HZ, power 2kw, tank capacity 18L.



Portable Pressure Steam Sterilizer

DSX-280B

- Fully stainless steel structure.
- Hand wheel type of quick-open door structure.
- Digital display of working status, touch type key.
- Automatically shut off with beep reminding after sterilization.
- Electric heated.
- Scope of sterilization temperature (50℃-126℃)
- Scope of sterilization time(0-99 hours)
- Tank thickness:2.0mm
- Power supply AC220V/50HZ, power 2kw, tank capacity 14L.



Vertical Pressure Steam Sterilizer

LDZM-40KCS

- Fully stainless steel structure.
- Digital display of working status, touch type key.
- Automatically shut off with beep reminding after sterilization.
- Safe interlocking control with water break protection device.
- Electric heated.
- Scope of sterilization temperature (50℃-134℃)
- Scope of sterilization time(0-99 hours)
- Tank thickness:2.0mm
- Power supply AC220V/50HZ, power 2kw, tank capacity 38L.



Medical Vacuum Drying Cabinet

HTYG-120



Fast temperature rise and short drying cycle.
Forced hot air circulation system to effectively control heat loss, and reduce time and cost.
Intelligent programmed with 4 categories of drying process for metal, plastic, glass and others.
Each category has a default setting of temperature, humidity and time, which could be modified according to user requirements.
Multi-layers of drying support, flexible and convenient.
External tray to restore water discharged from the cabinet.
Power supply AC220V/50HZ, power 3.2kw, chamber capacity 120L.

Medical Drying Cabinet

HTY-300



Comprehensive medical drying equipment with large capacity.
Suitable for medical supply room, operating room and other units.
Can be used for drying surgical instruments, glassware and anesthesia, respiratory treatment devices.
Well designed structure with high thermal efficiency, easy to operate.
Electric heating system with hot air circulation to form multiple layers of air flow.
Digital display panel for temperature control.
Shutdown timer to control the drying process automatically as required.
High pressure fan for air intake to ensure chamber temperature stays between 65 -80 degrees.
High quality mirror 304 stainless steel chamber and electromagnetic lock doors for easy and safe use.
Power supply AC220V/50HZ, chamber capacity 330L.

Vertical Steam Sterilizer

DGL-35X



Multifunctional automatic internal air and steam circulation system.
Fully stainless steel structure.
Hand wheel type of quick-open door structure.
Digital display of working status, touch type key.
Automatically shut off with beep reminding after sterilization or drying.
Electric heated.
Scope of sterilization temperature (50℃-134℃)
Scope of sterilization time (4-120min), scope of drying time (0-240min)
Safety interlocking system and self-expanding seal.
Automatic protection for over temperature, overpressure and low water level.
Automatic discharge of cold air or steam after each use.
Power supply AC220V/50HZ, power 3.5kw, tank capacity 35L.

Ultrasonic Cleaners

HTYC-50



This industrial ultrasonic cleaner uses 900W of power to fill its 60L basin with cavitation bubbles, using the force of their tiny implosions to thoroughly and professionally clean even small and intricate surfaces. Suitable for hospital scalpels, mobile phone, hemostatic forceps, endoscopic forceps, tweezers, injection needles, syringes, test tube, glass sheet, dressing bowl, plates and trays, buckets, pressure gauge etc. Professional quality cleaning without any harmful chemicals or radiation, quickly removes rust, tarnish and other stains.
Stainless steel inside and out to withstand years of continual use with or without cleaning solutions for the inner basket and tank and to keep outer surfaces stronger and resist wear and tear.
Power supply AC220V/50HZ, tank capacity 60L.

Wall-mounted plasma air disinfectors

CF/B1000



- 1. Efficient plasma-integrated modules rapidly destroy pathogenic cells against airborne phages such as Staphylococcus albus
- 2. The sterilization rate of plasma air disinfection machine is as high as 99.9%
- 3. The intelligent control system monitors and displays the air quality in real time. The automatic timer turns the unit on and off at preset times. Customize flexible sterilization solutions to reduce labor costs
- 4. Harmless for humen, ultra-low noise, sterilization without generating harmful gases

Applicable scene

- 1. It is suitable for disinfection in outpatient clinics such as pediatrics, fever clinics, and infectious diseases, and in spaces with high mobility of personnel
- 2. Schools, childcare institutions, etc.
- 3. Public areas with dense crowds and high mobility

Mobile plasma air disinfectors

CF/Y1000



- 1. Efficient plasma-integrated modules rapidly destroy pathogenic cells against airborne phages such as Staphylococcus albus
- 2. The sterilization rate of plasma air disinfection machine is as high as 99.9%
- 3. The intelligent control system monitors and displays the air quality in real time. The automatic timer turns the unit on and off at preset times. Customize flexible sterilization solutions to reduce labor costs
- 4. Harmless for humen, ultra-low noise, sterilization without generating harmful gases

Applicable scene

- 1. It is suitable for disinfection in outpatient clinics such as pediatrics, fever clinics, and infectious diseases, and in spaces with high mobility of personnel
- 2. Schools, childcare institutions, etc.
- 3. Public areas with dense crowds and high mobility

Ceiling-mounted plasma air disinfectors

CF/Q1200



- 1. Efficient plasma-integrated modules rapidly destroy pathogenic cells against airborne phages such as Staphylococcus albus
- 2. The sterilization rate of plasma air disinfection machine is as high as 99.9%
- 3. The intelligent control system monitors and displays the air quality in real time. The automatic timer turns the unit on and off at preset times. Customize flexible sterilization solutions to reduce labor costs
- 4. Harmless for human, ultra-low noise, sterilization without generating harmful gases

Applicable scene

- 1. It is suitable for disinfection in outpatient clinics such as pediatrics, fever clinics, and infectious diseases, and in spaces with high mobility of personnel
- 2. Schools, childcare institutions, etc.
- 3. Public areas with dense crowds and high mobility

Cabinet type plasma air disinfectors

CF/G150



- 1. Efficient plasma-integrated modules rapidly destroy pathogenic cells against airborne phages such as Staphylococcus albus
- 2. The sterilization rate of plasma air disinfection machine is as high as 99.9%
- 3. The intelligent control system monitors and displays the air quality in real time. The automatic timer turns the unit on and off at preset times. Customize flexible sterilization solutions to reduce labor costs
- 4. Harmless for human, ultra-low noise, sterilization without generating harmful gases

Applicable scene

- 1. It is suitable for disinfection in outpatient clinics such as pediatrics, fever clinics, and infectious diseases, and in spaces with high mobility of personnel
- 2. Schools, childcare institutions, etc.
- 3. Public areas with dense crowds and high mobility



Wall-mounted UV air disinfectors

CF/B100



- 1. High-intensity ultraviolet lamp bulb, high disinfection efficiency
- 2. Multiple protective sunshades, Harmless for human
- 3. Wall-mounted installation, does not take up space
- 4. Beautiful appearance, stylish and simple
- 5. Ultra-low wind resistance, quiet and clean
- 6. Simple operation, one key to open
- 7. Adjustable wind speed, three gears

Applicable scene

- 1. It is suitable for disinfection in outpatient clinics such as pediatrics, fever clinics, infectious diseases, and places with high mobility of personnel
- 2. Schools, childcare institutions, etc.
- 3. Public areas with dense crowds and high mobility

Mobile UV air disinfectors

CF/Y120



- 1. Continuous dynamic disinfection of indoor air without any harm to people and objects.
- 2. Disinfection is odorless, no radiation, no corrosion of equipment.
- 3. Air filter, absorb dust
- 4. Wind speed status display, and can be freely selected according to high, medium and low.
- 5. Support touch screen operation and mobile phone remote control.
- 6. The silent motor circulates the air, and the disinfection process has no noise.

Applicable scene

- 1. It is suitable for disinfection in outpatient clinics such as pediatrics, fever clinics, and infectious diseases, and in spaces with high mobility of personnel
- 2. Schools, childcare institutions, etc.
- 3. Public areas with dense crowds and high mobility

Ceiling-mounted UV air disinfectors

CF/Q150



- 1. Made of low-ozone high-intensity ultraviolet germicidal lamps to achieve instant disinfection effect
- 2. The sterilization rate of ultraviolet air disinfection machine can reach 99.9%
- 3. The intelligent control system monitors and displays the air quality in real time. The automatic timer turns the unit on and off at preset times. Customize flexible sterilization solutions to reduce labor costs
- 4. Ultra-low silent motor, no harmful gas while sterilizing

Applicable scene

- 1. It is suitable for disinfection in outpatient clinics such as pediatrics, fever clinics, and infectious diseases, and in spaces with high mobility of personnel
- 2. Schools, childcare institutions, etc.
- 3. Public areas with dense crowds and high mobility

Upper level flat shot UV disinfectors

CF/BVU1000



- 1. Endoscopic reflection plus optical lens to realize real flat shooting with ultraviolet light
- 2. Imported high-efficiency ozone-free ultraviolet lamps are used, and the energy per 1 meter can reach more than 200UW
- 3. Original ozone filtration and decomposition technology to achieve no leakage of ozone
- 4. Timing start and stop, intelligent detection, when the height of the person exceeds 2.1 meters, the upper UV panel light will be automatically turned off
- 5. No ultraviolet rays below 2.1 meters
- 6. Quiet and low noise motor
- 7. Multi-mode selection, upper flat shot disinfection, air circulation purification

Applicable scene

- 1. It is especially suitable for the disinfection of highly infectious wards such as tuberculosis
- 2. Replace the original ultraviolet lamp, suitable for all places that need ultraviolet lamp disinfection
- 3. Outpatient wards, general wards, inpatient wards, emergency rooms and other areas
- 4. Public areas with dense crowds and high mobility

Wall-mounted plasma air disinfectant

CF/CXD



1. Rapid sterilization mode, rapid sterilization
2. APP remote monitoring, log storage is convenient for viewing, and device management is more convenient
3. The machine is equipped with an ozone temperature sensor to control the working status of the equipment in real time
4. Large-capacity storage room, multiple security guarantees
5. New ozone analysis technology, ozone analysis device + activated carbon adsorption, double purification, no residue, no secondary pollution.

Applicable scene

Disinfect quilts, mattresses, pillow cores, etc.

Handheld UV disinfectant

CF/S2



1. Use UVC high energy to eliminate viruses in a short time of 2 seconds, and the sterilization rate is $\geq 99.9\%$
2. Disinfect at any time, harmless to the human body, the effective sterilization distance is within 10cm, and the average ultraviolet radiation intensity is $10\text{mW}/\text{cm}^2$
3. Low energy consumption, small size, long life
4. Ultraviolet sterilization can work continuously, does not produce harmful substances, does not contain mercury, is non-toxic and has no chemical residues
5. Trigger switch, external safety lock.

Applicable scene

1. It is suitable for disinfection in outpatient clinics such as pediatrics, fever clinics, and infectious diseases, and in spaces with high mobility of personnel
2. Schools, childcare institutions, etc.
3. Public areas with dense crowds and high mobility

Wall-mounted plasma air disinfectant

JWK/JH-A



Disinfectable area (m³) 120

The shell is made of metal, using modern moisture-proof and anti-rust technology, and the panel is made of acrylic crystal panel

Independent design, smaller than other similar products, compact and convenient.

It adopts microcomputer program control, Chinese LCD display, and touch button operation, which is simple and convenient.

It adopts imported high-precision real-time clock chip control, which is stable and reliable.

The automatic disinfection time can be set to six time periods, and the disinfection time can be set arbitrarily.

It adopts ultra-far infrared control receiving device, which can be operated remotely.

Using 1-13000v adjustable high-pressure plasma generator has good disinfection effect and stable performance"

Mobile plasma air disinfectant

JWK/JH-B



Disinfectable area (m³) 150

Independent appearance design, smaller, compact and convenient than other similar products.

It adopts microcomputer program control, Chinese LCD display, and touch button operation, which is simple and convenient.

It adopts imported high-precision real-time clock chip control, which is stable and reliable.

The automatic disinfection time can be set to six time periods, and the disinfection time can be set arbitrarily.

It adopts ultra-far infrared control receiving device, which can be operated remotely.

The air outlet is automatically opened when it is working, and it is automatically closed when it is closed.

When working, automatic horizontal circulation sweeping air can be circulated quickly,

Disinfect indoor air.

Air Disinfector

KXD-X-1000P



The product consists of a primary filter, a fan and a plasma disinfection module. The fan drives the air to circulate into the machine, and the plasma module disinfects the air. After several cycles, the room space can be disinfected.

Disinfection principle: Pathogens are killed by high-pressure plasma.

Target microorganisms: Microorganisms commonly found in the air.

Model KXD-X-1000P

Dimensions (mm) 680×680×440

Weight (kg) 30

Plasma field strength (KV) 8

Applicable space (m³) 100

Working time (minutes) ≥ 60

Power (watts) 135

Lifespan 10 years"

Air Disinfector

KXD-Y-1000P



The product consists of a primary filter, a fan and a plasma disinfection module. The fan drives the air to circulate into the machine, and the plasma module disinfects the air. After several cycles, the room space can be disinfected.

Disinfection principle: Pathogens are killed by high-pressure plasma.

Target microorganisms: Microorganisms commonly found in the air.

Model KXD-Y-1000P

Dimensions (mm) 325×420×830

Weight (kg) 29

Plasma field strength (KV) 8

Applicable space (m³) 100

Working time (minutes) ≥ 60

Power (watts) 138

Lifespan 10 years"

Arm Blood Pressure Monitor

KWL-B04

Storage temperature: -20℃~50℃ Storage humidity: 15%~90%
Operating temperature: 10℃ to 40℃ Operating humidity: 40% to 85%
Display mode: LCD digital display
Measurement method: pulse scanning method/oscillograph method
Measurement range: hypertension/hypotension: 20mmHg~280mmHg
Arm circumference can be measured: 22cm-32cm



Electronic Arm Blood Pressure Monitor

KWL-B02

1. Dry electricity: DC-6.0V(4 AAA dry batteries)
2. Blood pressure measurement range: (0-280)mmHg; Allowable error: ±3mmHg.
3. Pulse measurement range: (40-199) beats \ min; Allowable error: ±5%.
4. Arm circumference can be measured: 22cm-32cm;
- Air leakage device: air release valve.
5. Temperature measurement method: oscilloscope step-down measurement;
Quick exhaust mode: automatic exhaust valve.
- 6: display mode: LED display; Inflation mode: Automatic inflation.
7. The result shows: high voltage \ low voltage \ pulse; Screen size: 58mmx42mm



Electronic Arm Blood Pressure Monitor

KWL-B01

Storage temperature: -20℃~50℃ Storage humidity: 15%~90%
Operating temperature: 10℃ to 40℃ Operating humidity: 40% to 85%
Display mode: LCD digital display
Measurement method: pulse scanning method/oscillograph method
Measurement range: hypertension/hypotension: 20mmHg~280mmHg
Arm circumference can be measured: 22cm-32cm



Electronic Arm Blood Pressure Monitor

KWL-B118

Input voltage: Lithium DC3.7V(built-in lithium battery /1500mAh)
Blood pressure measurement range: (0-280)mmHg Tolerance error: ±3mmHg.
Pulse measurement range: (40-199) stroke tolerance error: ±5%.
Arm circumference can be measured: 22cm-32cm
Air leakage installation: air release valve.
Temperature measurement method: oscilloscopic step-down measurement
Rapid exhaust method: automatic exhaust valve.
Display mode: digital tube display aeration square type: automatic aeration.
The result shows: high voltage, low voltage, pulse screen size: 80mm x 80mm



Electronic Arm Blood Pressure Monitor

KWL-B106

Input voltage: Lithium DC3.7V(built-in lithium battery /1500mAh)
Blood pressure measurement range: (0-280)mmHg Tolerance error: ±3mmHg.
Pulse measurement range: (40-199) stroke tolerance error: ±5%.
Arm circumference can be measured: 22cm-32cm
Air leakage installation: air release valve.
Temperature measurement method: oscilloscopic step-down measurement
Rapid exhaust method: automatic exhaust valve.
Display mode: digital tube display aeration square type: automatic aeration.
The result shows: high voltage, low voltage, pulse screen size: 74mm x 73.5mm



Wrist Electronic Blood Pressure Monitor

KWL-W01

Storage temperature: -20℃~50℃ Storage humidity: 15%~90%
Operating temperature: 10℃ to 40℃ Operating humidity: 40% to 85%
Display mode: LCD digital display
Measurement method: pulse scanning method/oscillograph method
Measurement range: hypertension/hypotension: 20mmHg~280mmHg
Wrist circumference can be measured: 13.5cm-19.5cm



Automatic Arm Electronic Blood Pressure Monitor

PG-800B68

Automatic electronic blood pressure monitor is intended for use by medical professionals or at home to monitor and display diastolic, systolic blood pressure and pulse rate on adult each time.

Measuring Method: Oscillometric Measurement

Indication: 62*72mm Digital LCD display

Measuring Range: Pressure: (30~280)mmHg Pulse: (40~199)Beat/min

Accuracy: Static Pressure: ± 3 mmHg, Pulse: $\pm 5\%$

Power Supply: 4pcs AAA*1.5V Batteries and DC 6V



Portable Mesh Nebulizer

KWL-U101

1. Input voltage: lithium DC3.7V(built-in lithium battery /350mAh)/ dry power: DC-3.0V (2 No. 5 dry batteries)
2. Atomization rate: ≥ 0.25 ml/Min
3. Nominal frequency: 110kHz
4. Deviation between working frequency and nominal frequency: $\pm 10\%$
5. Working noise: ≤ 45 dB(A weight)
6. Maximum water temperature in the medicine cup: $\leq 35^\circ$
7. The median particle size of fog particles: 4 μ m, the error is not more than $\pm 25\%$
8. Equivalent volume particle size distribution: the proportion of fog particles not larger than $\phi 5\mu$ m is $> 60\%$
9. Automatic shutdown: After atomizing liquid medicine, automatic shutdown
10. Operating conditions: Ambient temperature: 5° to 40° , relative humidity: $\leq 80\%$ RH



Mesh Nebulizer Machine

DM-YWH01L

Intelligent type

Rated voltage 220v/50hz, rated power: 120va

Noise value ≤ 65 db, particle size: $\phi 5\mu$ m

Dimensions: 22*17.8*13.6cm

Weight 1.8kg



Infrared Thermometer/Forehead/Thermometer

KWL-F01

Memory function: 32 groups;

Automatic shutdown time: < 60 S

Test distance: 5-8cm;

Measuring range: not narrow to 35°C - 42°C

Temperature : 16°C ~ 35°C

Relative humidity : $\leq 85\%$ RH

Atmospheric pressure range 70-106KPa

Product size: Length 157mm \times width 40mm \times height 40mm



Infrared Thermometer/Forehead/Thermometer

KWL-F02

Memory function: 32 groups;

Automatic shutdown time: < 60 S

Test distance: 5-8cm;

Measuring range: not narrow to 35°C - 42°C

Temperature : 16°C ~ 35°C

Relative humidity : $\leq 85\%$ RH

Atmospheric pressure range 70-106KPa

Product size: Length 157mm \times width 40mm \times height 40mm



Portable Electronic Neck Massager

PG-2601B19

Whether you are tired of experiencing neck pain or you simply struggle to relax and unwind, this portable electronic neck massager device aims to treat neck pain, promote local blood, circulation, relax local muscles, relieve fatigue and help you relax with its multitude of variable settings.

Power Supply: 5V DC 1A(USB charge)

Input Power: 5W

Lithium Battery: 3.7V DC 1100mAh

Frequency: 1-1000Hz

Impluse Width: 20-400 μ s



Portable oxygen concentrator/home oxygen machine

DE-2AW

High flow rate 2-9L adjustable
Oxygen concentration and atomization
Pure copper oil-free compressor
HD LED touch screen
Touch control flow rate
Double oxygen inhalation
Oxygen Concentration: 90%±3%(2L/min)
Oxygen Flow Rate: 2-9L/min adjustable
Atomization Rate: ≥ 0.2ml/Min
Flow Adjustment Method: Touch screen control
Oxygen Production Method: Pressure Swing Adsorption (PSA)
Display Control: LED touch screen
Control Distance: 20 Meters Infrared Remote Control
Operating Noise: ≤ 45db (A)
Rated Voltage: AC 220V/50Hz AC 110V/60Hz
Rated Power: 170VA



Portable oxygen concentrator/home oxygen machine

DE-1LW

1-7L flow adjustable
Pure copper oil-free compressor
Touch control flow rate
Oxygen atomization unit
Supports simultaneous oxygen inhalation for two people
Oxygen Concentration: 90%±3%(1L/min)
Oxygen Flow Rate: 1-7L/min adjustable
Atomization Rate: ≥ 0.2ml/Min
Flow Adjustment Method: Touch screen control
Flow Adjustment Method: Touch screen control
Oxygen Production Method: Pressure Swing Adsorption (PSA)
Display Control: LED touch screen
Control Distance: 18 Meters Infrared Remote Control
Operating Noise: ≤ 45db (A)
Rated Voltage: AC 220V/50Hz AC 110V/60Hz
Rated Power: 120VA



Semi-Automated External Biphasic Defibrillator

BeneHeart S2



1. The size is not more than: 100mm (height) × 210mm (width) × 300 mm (length) ±10mm, and the machine.With its own portable handle, easy to carry.
 2. Weight ≤2.6kg (including electrode and battery) Easy to carry and use in public places.
 3. Provide bilingual voice prompt in both Chinese and English. You can quickly switch between Chinese and English with one click without restarting.
 4. Not less than 5 inches color screen, improve the operation guidance of ordinary rescue personnel, accurate rescue.
 5. The screen resolution is not less than 780×480, there is a clear animation guide to put multifunctional electrode, discharge, Cardiopulmonary resuscitation (CPR) and other operations can guide ordinary rescue workers to carry out efficient rescue operations.
 6. Provide bilingual voice prompt in Chinese and English, and you can quickly switch between Chinese and English with one click without restarting.
 7. The defibrillation button has an eye-catching blinking prompt.
 8. Data storage: ECG waveform data, event data, recording data, first aid data (including first aid time, duration of CPR, discharge times and other factors), recording data, etc.
 9. Provide smart voice broadcasting. According to the response speed of the emergency personnel, the device intelligent prompts the emergency personnel to remove the patient.Clothes, paste electrode sheet.
 10. With internal automatic discharge function, to ensure the safety of patients and medical staff.
- Consumables:
1. The electrode has a clear sticking position diagram to reduce the error rate in the rescue process and improve the rescue efficiency
 2. In standby state, the electrode must be connected with the machine in advance to save precious rescue time

Stress Therapy Electric 180° Foldable Portable Eye Mmassager

EYE8

High flow rate 2-9L adjustable
Oxygen concentration and atomization
Pure copper oil-free compressor
HD LED touch screen
Touch control flow rate
Double oxygen inhalation
Oxygen Concentration: 90%±3%(2L/min)
Oxygen Flow Rate: 2-9L/min adjustable
Atomization Rate: ≥ 0.2ml/Min
Flow Adjustment Method: Touch screen control
Oxygen Production Method: Pressure Swing Adsorption (PSA)
Display Control: LED touch screen
Control Distance: 20 Meters Infrared Remote Control
Operating Noise: ≤ 45db (A)
Rated Voltage: AC 220V/50Hz AC 110V/60Hz
Rated Power: 170VA



Smart Bluetooth Eye Care Massager with Vibrating and Heating

EYE7

EYE7 is an integrated intelligent eye massager, which is designed according to ergonomics and physical massage techniques. Through air pressure massage, vibration ball massage and heating, it can repeatedly massage the temples and eye points, relieve eye fatigue, relax the body and mind.
Power Supply:5V DC 1A
Lithium Battery:3.7V, 1450mAh
Function:air pressure, heating, vibration, Bluetooth, music therapy



Intelligent Eye Relaxation Massager

EYE6

EYE6 is an integrated intelligent eye massager, which is designed according to ergonomics and physical massage techniques. Through air pressure massage, vibration ball massage and heating, it can repeatedly massage the temples and eye points, relieve eye fatigue, relax the body and mind.
Power Supply:5V DC 1A
Lithium Battery:3.7V, 1450mAh
Function:air pressure, heating, vibration, Bluetooth, music therapy



Abdominal Waist Massager Belt

PG-2648

The working principle of this product is to send a movement signal to the human skin through the massager, exercise the muscles of the waist and abdomen, and by adjusting the intensity and heating temperature to promote blood circulation, accelerate fat movement, and relieve fatigue.
Power Supply:5V DC 1A(USB charge)
Lithium Battery:3.7V DC 2000mAh
Heating Temperature:around 38°C ~ 48°C (under the 23°C±2°C environment)



Electric Waist Massager

PG-2510

The Intelligent Heating Belt adopt far-infrared carbon fibre and vibration massage technology, it can It can promote blood circulation, regulate meridians and collaterals, accelerate fat burning. Suitable for female, constipation, overweight and the like, including who in menstrual period and the group suffering stomach disorder.
Power Supply:5V DC 1A(USB charge)
Lithium Battery:3.7V DC 2000mAh
Color:pink, white
Heating Temperature:around 40°C ~ 50°C



Waist Slimming Massage Belt

PG-2641

This product emits sports-inducing signal to human skin to build abdominal muscle, promotes blood circulation and accelerates burning fat through modulating intensity and mode of low frequency current in combination with hot compressing, to meet the requirements of all groups of users.
Color:white and rose red
Power Supply:3.7V DC 2200mAh
Charing Power:DC 5V 1A(USB charge)
Heating Temperature:around 38°C ~ 48°C (in 23°C±2°C environment)



Electric Vibroaction Heating Belly Waist Slimming Massage Belt

PG-2507

The Intelligent Heating Belt adopt far-infrared carbon fibre and vibration massage technology, it can It can promote blood circulation, regulate meridians and collaterals, accelerate fat burning. Suitable for female, constipation, overweight and the like, including who in menstrual period and the group suffering stomach disorder.

Color: pink and white

Power Supply: 3.7V DC 2000mAh

Charing Power: DC5V 1A(USB charge)

Heating Temperature: around 38°C ~ 48°C (in 23°C ± 2°C environment)

Flow Adjustment Method: Touch screen control

Oxygen Production Method: Pressure Swing Adsorption (PSA)

Display Control: LED touch screen

Control Distance: 20 Meters Infrared Remote Control

Operating Noise: ≤ 45db (A)

Rated Voltage: AC 220V/50Hz AC 110V/60Hz

Rated Power: 170VA



Leg and Foot Massager

PG-2015F1

this air pressure foot massager will apply multiple points of pressure to both sides of your calf muscles. All it requires is for you to press the on switch; then you will soon find your aches and pains being eased by the electrical massaging patterns. Nerves, muscles and joints will all be relieved by massaging your legs. There are two leg attachments along with the air massager itself.

Power Supply: 100-240V AC, 50/60Hz frequency and 0.2A, can be converted to DC6V 800mA

Pressure Intensity: ≤ 180mmHg

Ambient Temperature Range: -20°C ~ +55-20°C

Atmospheric Pressure Range: 50kPa-106kPa



Electric Pulse Lower Back Waist Abdomen Massage Device

PG-2643

PG-2643 is a waist massager specially designed for women, which has the advantages of professionalism, fashion and portability. In order to improve the portability and efficacy, it is designed to be thinner, at the same time, the waist care and physical therapy functions are combined to make the massage effect more significant.

Color: white

Power Supply: 3.7V DC 2000mAh

Impulse Frequency: 1-1000Hz

Impulase Width: 20-400μs

Heating Temperature: around 38°C ~ 45°C (in 23°C ± 2°C environment)



Automatic Vibrating Octopus Head and Scalp Relaxing Massager

PG-2705

Scalp massager applies to 3D massage technology, simulates head SPA massage method, acts on physical head, thus promote head blood circulation, relax brain, relieve tense, pleasantly enjoy head massage at home. Along with hair dressing, easily help cleaning scalp dirt and keeping refreshing and health of scalp.

Power Supply: 5V DC 1A(USB charge)

Lithium Battery: 3.7V DC 1450mAh

Material: ABS + siliceous

Timing: 15min



Scalp Massager

PG-2701

Scalp massager applies to 3D massage technology, simulates head SPA massage method, acts on physical head, thus promote head blood circulation, relax brain, relieve tense, pleasantly enjoy head massage at home. Along with hair dressing, easily help cleaning scalp dirt and keeping refreshing and health of scalp.

Power Supply: 5V DC 1A(USB charge)

Lithium Battery: 3.7V DC 1450mAh

Charge Time: 2-3hrs

Timing: 15min



Smart Knee Massager

PG-2015F4

Smart knee massager PG-2015F4 has 4 functions: air pressure, vibration, heat and red light therapy functions, which can acupuncture points ,improves the blood flow & circulation around the knee, helps to soothe the pain of the knee joints and relax the muscles, tense sore muscles around the kneecap.

Color:white black

Power Supply:5V DC 1A(USB charge)

Lithium Battery:3.7V DC 3000mAh

Heating Temperature:around 38°C ~ 48°C



Blood Glucose Meter/Blood Glucose Monitor Kit

KH100

1 µL blood sample

7 seconds test time

Auto coding

GOD enzyme test strip

hematocrit range 30%-50%

memory 250 test results

test trip ejector



Portable Electronic Neck Massager

PG-2601B51

Whether you are tired of experiencing neck pain or you simply struggle to relax and unwind, this portable electronic neck massager device aims to treat neck pain, promote local blood, circulation, relax local muscles, relieve fatigue and help you relax with its multitude of variable settings.

Power Supply:5V DC 1A(USB charge)

Input Power:7W

Function:red light, shiatsu massage, heating

Decibel:Less than 55 dB



Stress Therapy Electric Eye 4D Smart Airbag Vibration Massager

PG-2404G5 Bluetooth

This product adopts vibration massaging and far-infrared heating at certain vibration amplitude and frequency to accelerate the blood circulation around eyes, so as to ease the eyes of users.

Power Supply:5V DC 1A

Lithium Battery:3.7V, 1450mAh

Function:bluetooth music, air pressure, heating, vibration, foldable

Color:white and gray



Portable Electronic Neck Massager

P6

Whether you are tired of experiencing neck pain or you simply struggle to relax and unwind, this portable electronic neck massager device aims to treat neck pain, promote local blood, circulation, relax local muscles, relieve fatigue and help you relax with its multitude of variable settings.

Power Supply:5V DC 1000mA, input power 5W

Impluse Frequency:1-1000Hz

Impluse Width:20-400µs

Thermotherapy Temperature:+38°C~+48°C (under natural environment of 25°C)



Body Torso Splint/Medical Brace

45-1506

Design to fix the patient

Applicable for patient injured in rib

Strips are in three colors which can be quickly fixed

Equipped with Nylon buckles and safety belts

When used simultaneously with a neck fixation, the patient should be in sitting position, then be transferred to a PE stretcher



Digital Baby Scale

TS-YE8006

Digital Baby Scale, Big LCD display with blue backlight white words. 4XAAA batteries, which will be easily replaced when power is used out. Adopt a Four-angle high precision sensor measurement system.

Capacity:500g-100kg
LCD size:100*39mm
Division: 10g
Product Size:52*38*7.5cm
Glass size:320*275*6mm
Unit: KG/LB/ST
Product Net Weight: 2kg
Power:6V 4*AAA
Display:blue background,white word
Low battery (LO) and overload indication (Err)
Boot up weight: 5kg



FIRS AID KIT

44-1100

Contents :

- 1 First aid bag,6-3/4"x5-1/4"x3"
- 1 Tourniquet,1"x18"
- 10 Plastic Adhesive Strips,3/4"x3"
- 1 Emergency Blanket,84"x52"
- 1 First aid tape / Plaster,1"x10Yards
- 2 Conforming Gauze bandages,2"x5Yards
- 2 Wound dressing,Medium
- 2 Triangular Bandages, 36"x36"x51"
- 1 Tweezer,Plastic
- 6 Sterile Gauze Pads, 3"x3",12Ply
- 1 Disposable Penlight
- 6 Sterile Non-adherent Pads, 2"x3"
- 1 Pair of Scissors, 4"
- 10 Alcohol Pads



Handheld Muscle Massage Gun

PG-M180

Magic massager is your move personal masseuse, Relieves built-up muscle tension and pain while enhancing blood circulation. Built for deep tissue body massage. Delivers you intense, concentrated power to your tense muscles! It can aid with insomnia, muscular tension, stress, mental and physical relaxation, head-aches and migraines, back and neck pain, mental health, arthritis, general aches and pains.

Power Supply: DC 5V/1A(USB charge)
Lithium Battery: DC 3.7V/2000mAh
Input Power: 5W
Charging Time: about 3-4 hours



Muscle Massage Fascial Gun

PG-M190

It is ergonomic design with comfortable grip. Has four different heads to meet the massage needs of different body parts, with 3levels frequency conversion design and long battery life.

Power SupplyDC 7.4V 2200mAh
Input Power: 5W
Color: dark grey+red, customized colors
Charging Time: 2 hours



Kitchen Scale

TS-EK01

Product Size:215*165*55mm
Capacity:5kg
Division:1g
UNIT:g, lb, oz, ml, tl
Power:2xAAA batteries



Elastic bandage

Durable premium polyester material with great elasticity.
Size: 5x450cm, 7.5x450cm, 10x450cm, 15x450cm



JABL

Triangular cotton bandage

For bandaging of wounds, immobilization of fractures and dislocations, and as a sling for the support of an injured part of the body.
Flat packaged to save sapce.
With two safety pins to aid in bandage configuration and securing.
Easily fits into any first aid kit or pocket.
Size: 90x90x127cm



JATB

Medical cotton swab

Medical absorbent cotton and bamboo/wooden stick.
High absorption and hygienic, chemical free, soft and safety.
Length: 8cm, 10cm, 12cm.



MC-S01

Medical cotton ball

Two layers of absorbent cotton sterilized by ethylene oxide.
For one-time use only.
Extra soft & absorbent for all kinds of skincare, first aid & baby care.
Ball size: S, M, L



MC-S02

Disposable physiotherapy electrode piece

Used in conjunction with medium and low frequency physical therapy instruments.
Size: 80x80cm.



KYJ- LL-01

Medical Vaseline Gauze

Vaseline impregnated absorbent gauze.
Occlusive and clings and conforms to all body contours.
Seal air leaks and unwanted fluid loss.
Size: 5x10cm, 10x10cm, 10x20cm



MC-S03

Medical gauze pad

Medical degreased gauze with cushion tape.
Thick, high-strength, high-quality cotton.
Soft, breathable, comfortable and free from harmful chemicals.
Ethylene oxide sterilized for one-time use only.
Size: 20x30cm



MC-S04

Absorbent cotton gauze

Odorless plain woven cotton gauze.
Degreasing, bleaching or dyeing and purifying treated.
Non-sterile product.
Size: 6x8cm



MC-S05

Skim gauze block

Pure cotton with good water absorption and air permeability.
Absorbent cotton gauze only or with X-ray tracking lines.
Non-sterile product.
For medical operations such as surgery and wound treatment.
Size: 6x8cm,8x8cm,8x10cm



MC-S06

Medical bandage

MC-S07

Medical absorbent cotton gauze in roll.
Safe, healthy and suitable for professional use.
Durable and latex free.
Non-sterile product.
Size: 4.8x600cm, 6x600cm, 8x600cm



One-piece colostomy bag

101060-1

One-piece colostomy bag with max open 60mm.
Clamp closure.
Pack of 10pcs with 2 clamps.



Colostomy bag with detachable opening

2039057

Colostomy bag with max open 57mm.
Without opening baseplate.
Detachable structure of opening and clamp closure.
Pack of 10pcs with 2 clamps.



Opening baseplate

2030057-1

Match colostomy bag with detachable opening.
Max open size 57mm.
Pack of 5pcs



One-piece urostomy bag

111245

One-piece urostomy bag.
Max open size 45mm.
Pack of 10pcs.



Separation gel tube

HY01

For serum biochemistry and serology test.
With gel & clot activator, yellow cap.
Tube size: dia. 13mm, length 75mm and 100mm.
Specification: 1ml, 2ml, 3ml, 4ml, 5ml, 6ml.



Heparin & gel Tube

HY02

For emergency biochemical and blood ammonia test.
With gel & lithium heparin, with green cap.
Tube size: dia. 13mm, length 75mm and 100mm.
Specification: 1ml, 2ml, 3ml, 4ml, 5ml, 6ml, 7ml.



Glucose tube

HY03

For blood glucose and glucose tolerance test.
With sodium fluoride & sodium heparin, Grey cap.
Tube size: dia. 13mm, length 75mm and 100mm.
Specification: 1ml, 2ml, 3ml, 4ml, 5ml, 6ml, 7ml.



Clot activator tube

HY04

For serum biochemistry and serology test.
With clot activator, red cap.
Tube size: dia. 13mm, length 75mm and 100mm.
Specification: 1ml, 2ml, 3ml, 4ml, 5ml, 6ml.



3.8% sodium citrate

HY05

For erythrocyte sedimentation rate test.
With 3.8% sodium citrate, black cap.
Tube size: dia. 13mm, length 75mm and 100mm.
Specification: 1.6ml, 2.4ml, 3.2ml, 4ml.



DA005

Disposable isolation gown
Short sleeve style
Fabric: 40gsm SMS, blue color
Packing: 1pc per polybag



DC004

Type 5/6 Microporous coverall
SF material, 55 gsm
Size: S-2XL
Packing: 1pc per polybag



DC005

Type 4/5/6 Microporous coverall
SF material, 63 gsm
Size: S-3XL
Packing: 1pc per polybag



DC006

Type 3/4/5/6 Microporous coverall
SPP+PE material, 82 gsm
Size: S-3XL
Packing: 1pc per polybag



DA002

Disposable isolation gown
Long sleeve style, with stretchable cuff
Fabric: 40gsm SMS, blue color
Packing: 1pc per polybag



DA003

Disposable isolation gown
Long sleeve style, with stretchable cuff
Fabric: 20gsm PP+12gsm PE, blue color
Packing: 1pc per polybag



FC08

X-ray protection dress set
Polyamide and PU fabric with medical grade lead
and radiation protection materials
Lead equivalent: front 0.5mmPb, back & sleeves
0.25mmPb
Size: S-XL
Packing: 1 set per polybag



FC07

X-ray protection apron
Polyamide and PU fabric with medical grade lead
and radiation protection materials
Lead equivalent: 0.5mmPb
Size: S-XL
Packing: 1 set per polybag




DM001

3Ply disposable non woven medical mask
Packing: 50pcs per polybag



DM002

3Ply disposable non woven medical mask with printed patterns
Packing: 50pcs per polybag

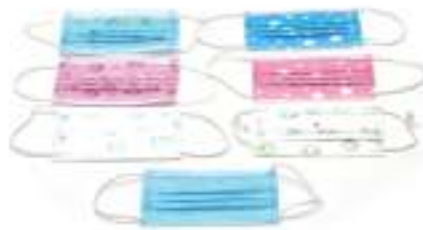

DM003

5Ply medical face mask
Skin-friendly inner layer in non-woven fabric, soft and breathable.
4 outer layers filter pm2.5 and other particles.
Packing: 1pc per polybag



DP003

Disposable Surgical Cap
SMS material, 40gsm
Size: 16x64CM
Packing: 100pcs per polybag



DS003

Disposable sleeve
SMS material, 40gsm
Size: 25x40CM
Packing: 10pcs per polybag



DSC004

Microporous shoes cover
SF material, 55 gsm
Packing: 50pcs per polybag



DSC005

Microporous shoes cover
SF material, 55 gsm
Packing: 50pcs per polybag



FC16

X-ray protection glasses
Lead equivalent: front
0.75mmPb,
side: 0.50mmPb
Packing: 1 set per polybag



2G01

Safety Goggles with elastic band, clear PVC lens
Coating available for anti-scratch and anti-fog function
Packing: 1 pc per polybag



FT2801

Safety Goggles
Lens material: PC with thickness 2mm
Frame material: PVC
Elastic tape material: polyester
Weight: 112g/pc
Mechanical strength: F(45 M/S)
Optical class: optical class 1
Elastic tape color: black
Certification: CE EN 166 1F 170 172
Packing: 1 pc per polybag



15010

Nitrile disposable examination gloves
With powder or powder free.
Size: S/M/L/XL
Packing: 100pcs per box



24040

Latex disposable examination gloves
with powder or powder free
Size: S/M/L/XL
Packing: 100pcs per box



35020

Vinyl disposable examination gloves
with powder or powder free
Size: S/M/L/XL
Packing: 100pcs per box

